




AL.5.210/20

- for normal loads
- low profile height
- three-dimensional absorption of movements
- solid full-aluminium structure

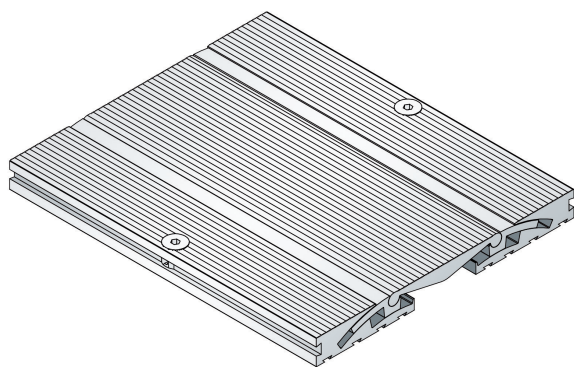

FEATURES

resistant to heavy loads, trafficable by fork-lift trucks, the special profile design means that no bearing leg slips under the floor covering (this prevents thin industrial floor coverings from tearing)

APPLICATIONS

all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

aluminium

COVERING TYPES

coating, concrete, screed, industrial covering, natural and stone slabs

TRAFFICABILITY

industrial trucks (lifting trucks, fork-lifts etc.), passenger car, trucks

FORMED PARTS

corner piece, T piece, cross piece

NOTES


We recommend that the customer applies grout between profile and covering so as to avoid typical hairline cracks.

Technical data

Movement horizontal:	30 mm (-10/+20 mm)
Movement vertical:	10 mm (± 5 mm)
Visible width:	210 mm
Maximal joint width:	50 mm
Load rating:	wheel load 1000 kg up to \varnothing 150 mm, B = 100 mm
Load rating trucks:	300 kN (DIN 1072)
Load rating forklifts:	70 kN (DIN 1055-3)
Supply length:	3 mtr

Designs

Article No.	Profile height (h)	Recess (WxD)
AL.5.210/20	20 mm	350 x 30 mm

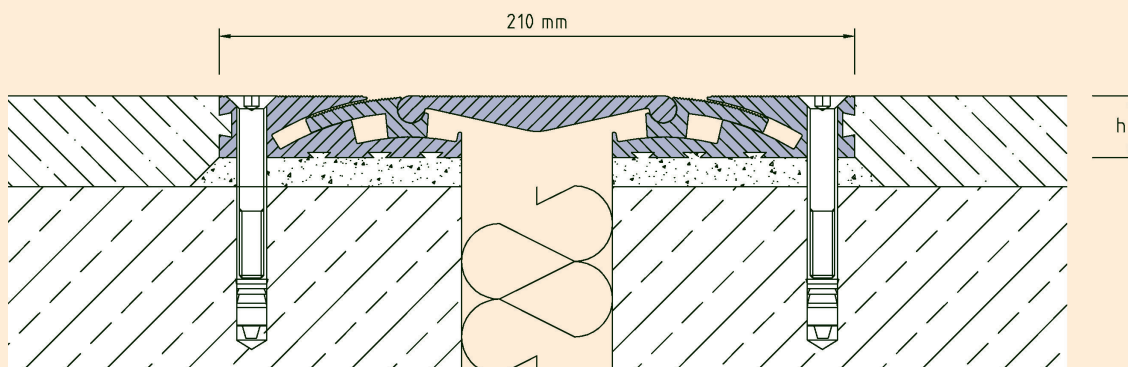

AL.5.210

Subject to technical change without notice.