

## KDF..

- cable fairlead
- with loose/fixed flange
- non-insulated structure

### APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

### MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

### COVERING TYPES


asphalt, concrete, screed

### NOTES

Threaded bolt M12x35 mm

KDF/34 with pipe Ø 33,7 mm

KDF/48 with pipe Ø 48,3 mm

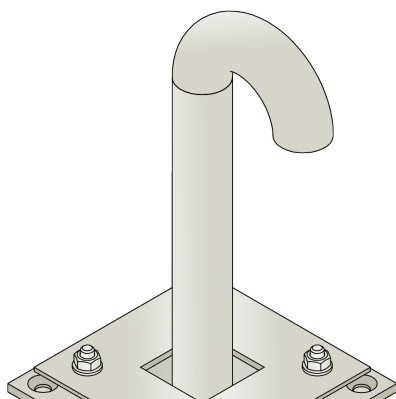


### TECHNICAL DATA

Material thickness fixed flange: 8 mm  
Material thickness loose flange: 6 mm

### DESIGNS

ARTICLE NO.	HEIGHT (h)
KDF34	400 mm
KDF48	400 mm

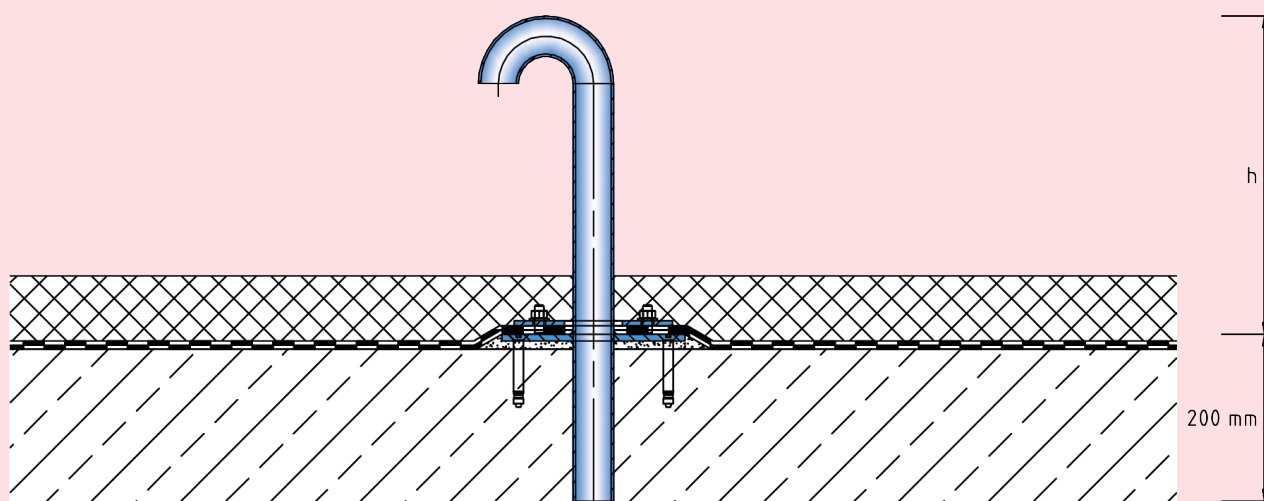

KDF..

Subject to technical change without notice.