



LFK2/..

- with loose/fixed flange
- covering separation
- edge termination

FEATURES

high edge protection, professional flooring separation

APPLICATIONS

outdoor, multi-storey and underground park decks, ramp accesses, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports

MATERIAL

hot-dip galvanised steel, high-grade steel V4A (on request)

COVERING TYPES

asphalt, concrete, screed


FORMED PARTS

end piece, corner piece, T piece, cross piece

NOTES

stud bolt M12x35 mm with lining disc and nut

Indication Profile height (h) from the lower edge of the loose flange
Solid flange joints should be fully welded through and ground flat on the sealing side.

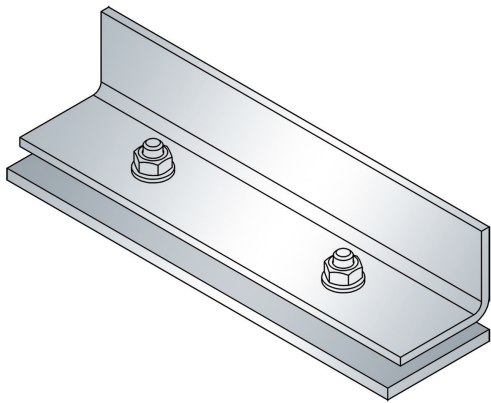


Technical data

Material thickness fixed flange: 8 mm
Material thickness loose flange: 6 mm
Supply length: 3 mtr

Designs

Article No.	Height (h)	Recess(WxD)
LFK2/50	50 mm	120 x 20 mm
LFK2/60	60 mm	120 x 20 mm
LFK2/80	80 mm	120 x 20 mm
Special heights on request.		

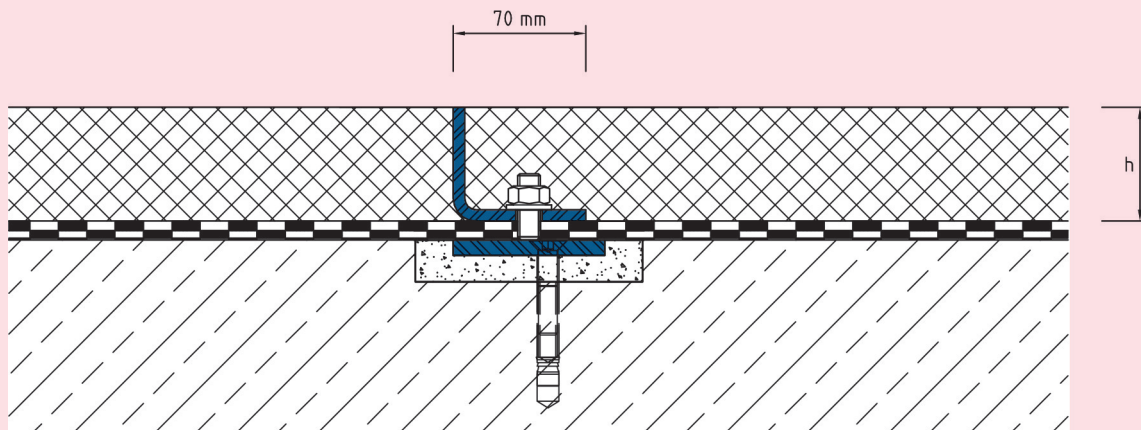

LFK2

Subject to technical change without notice.