



VA.12.9/..

- high edge protection
- aesthetically pleasing
- can be polished without smearing

FEATURES

punched bearing legs guarantee best connection to the subgrade/covering.

APPLICATIONS

shopping centres, railway stations, airports, residential, office and administration buildings

MATERIAL


high-grade steel V2A, EVA foam material in the central space

COVERING TYPES

screed, natural and stone slabs, terrazzo

NOTES

These profiles are supplied complete with all fittings (see www.buprofile.de).

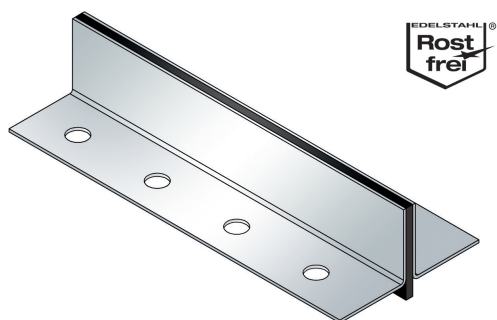


Technical data

Movement horizontal:	2 mm (± 1 mm)
Visible width:	9 mm
Material/sheet thickness:	2 mm
Load rating:	wheel load 600 kg up to \varnothing 150 mm, B = 100 mm
Supply length:	3 mtr
Color of flexible insert:	black

Designs

Article No.	Profile height (h)
VA.12.9/30	30 mm
VA.12.9/40	40 mm
VA.12.9/50	50 mm
VA.12.9/60	60 mm
VA.12.9/80	80 mm
VA.12.9/100	100 mm
Special heights on request.	

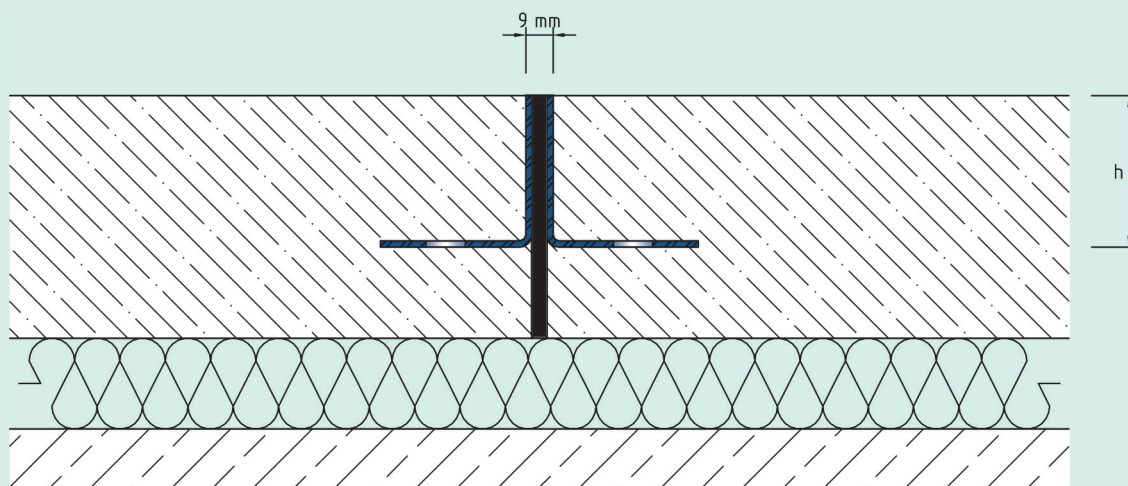

VA.12.9

Subject to technical change without notice.