



AL.1.54/.. G

- replaceable expansion insert
- hygiene-friendly and smooth expansion insert
- non-PVC
- stable aluminum supports

FEATURES

expansion insert can be replaced anytime, abrasion-, weather- and temperature-resistant (-40°C to +120°C), perforated bearing legs guarantee the best connection to the substrate/covering

APPLICATIONS

residential, office and administration buildings, hospitals and clean rooms

MATERIAL

aluminium, EPDM expansion insert

COVERING TYPES


coating, screed, natural and stone slabs

FORMED PARTS

corner piece, T-piece, cross piece, floor-wall connections

NOTES

For mastic asphalt, please ask for technical advice.

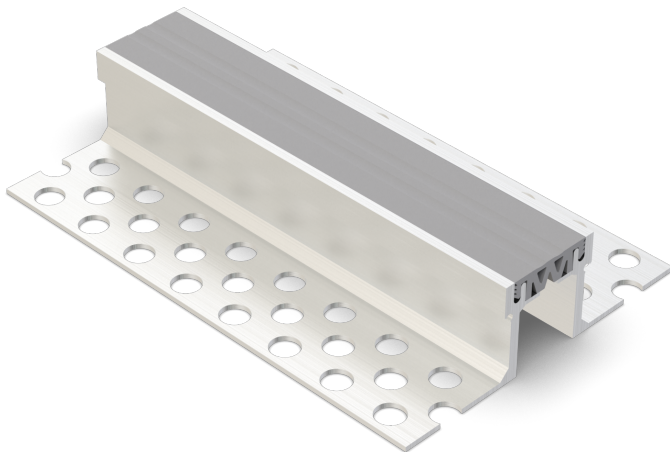


TECHNICAL DATA

Movement horizontal:	10 mm (±5 mm)
Movement vertical:	10 mm (±5 mm)
Visible width:	54 mm
Maximal joint width:	40 mm
Load rating:	wheel load 700 kg up to Ø 150 mm, B = 100 mm
Supply length:	3 mtr
Color of expansion insert:	grau

DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)	RECESS (BxT)
AL.1.54/20 G	20 mm	210 x 30 mm
AL.1.54/33 G	33 mm	210 x 43 mm
AL.1.54/50 G	50 mm	210 x 60 mm
AL.1.54/63 G	63 mm	210 x 73 mm
AL.1.54/83 G	83 mm	210 x 93 mm
AL.1.54/103 G	103 mm	210 x 113 mm
AL.1.54/123 G	123 mm	210 x 133 mm

Special heights on request.

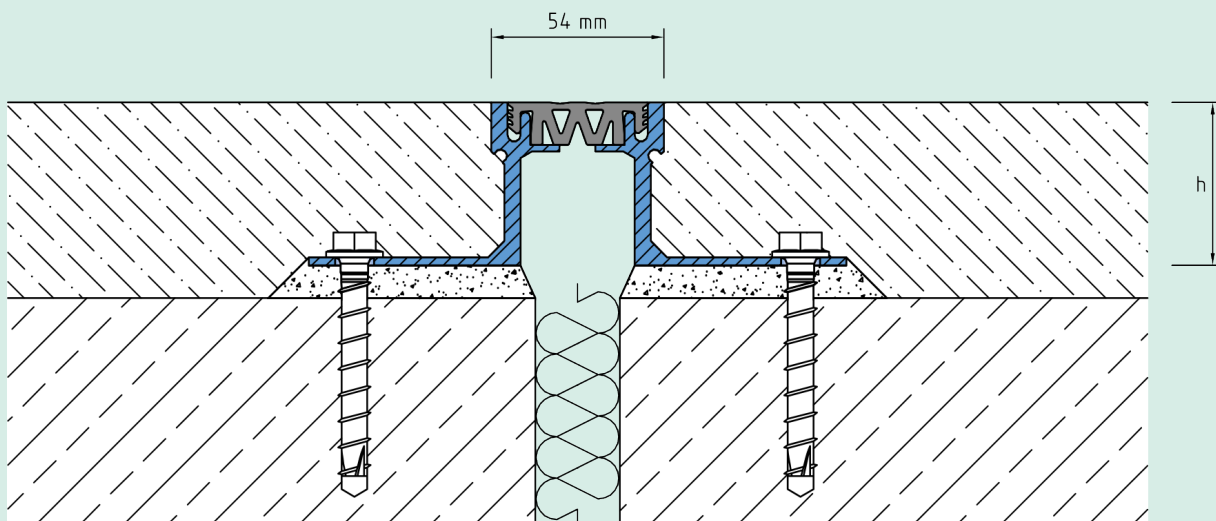

AL.1.54

Subject to technical change without notice.