



## AL.2.31/.. Ü

- replaceable expansion insert
- non-PVC
- projecting expansion insert

### FEATURES

expansion insert can be replaced anytime, abrasion-, weather- and temperature-resistant (-40°C to +120°C), perforated bearing legs guarantee the best connection to the substrate/covering, the joint profile is laid with a flush insert during the screed work and can therefore be used as a stripping edge, the overlap inlay supplied separately on rollers is replaced with the existing inlay during the covering work

### APPLICATIONS

residential, office and administration buildings

### MATERIAL

aluminium, EPDM expansion insert

### COVERING TYPES

screed with upper layer from linoleum, rubber or carpet

### FORMED PARTS

corner piece, T-piece, cross piece

### NOTES

Projection of the expansion insert: 5 mm




### TECHNICAL DATA

Movement horizontal:	10 mm ( $\pm 5$ mm)
Movement vertical:	8 mm ( $\pm 4$ mm)
Visible width:	31 mm
Maximal joint width:	30 mm
Load rating:	wheel load 500 kg up to $\varnothing$ 150 mm, B = 100 mm
Supply length:	3 mtr
Color of expansion insert:	schwarz oder grau

### DESIGNS

ARTICLE NO.	PROFILE HEIGHT <sup>(h)</sup>
AL.2.31/25 Ü	25 mm
AL.2.31/40 Ü	40 mm
AL.2.31/55 Ü	55 mm

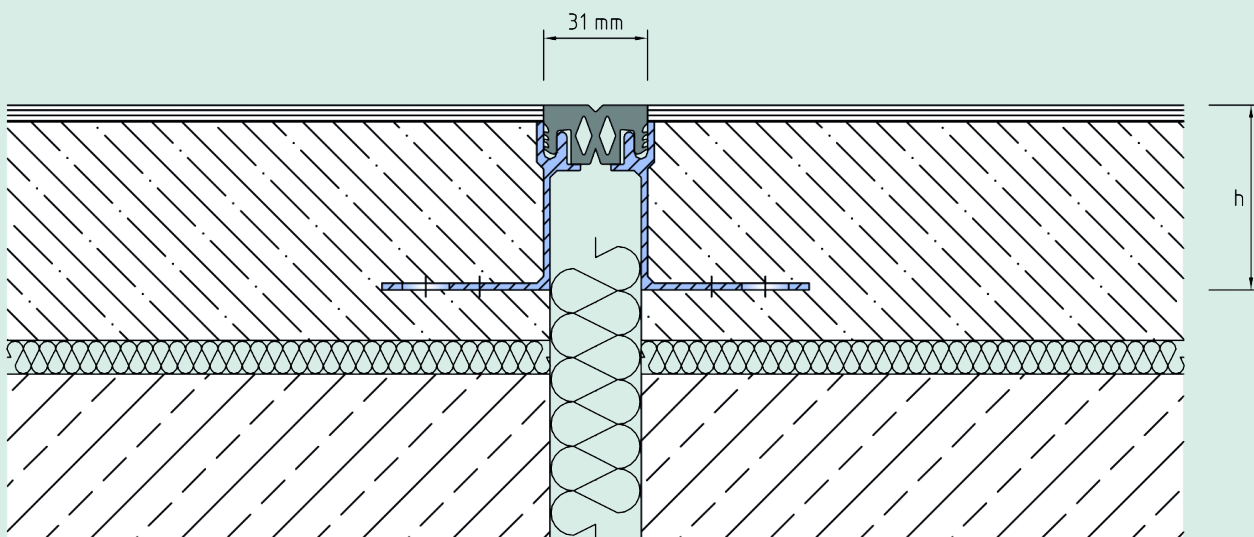

AL.2.31

Subject to technical change without notice.