

# ALK.8.250/..

- high load-bearing capacity
- with coating-flange

## FEATURES

resistant to heavy loads, permanently tight, corrosion-resistant, high flexibility (variable heights and widths), mesh size grating in 30x10 mm (30x30 mm on request), grid lock inclusive, drain pipe DN100, length 200 mm

## APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

## MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

## COVERING TYPES

coating

## TRAFFICABILITY

passenger cars (trucks on request)

## NOTES

For stainless steel, the general cleaning and care instructions must be observed (see also download area).




## TECHNICAL DATA

Material thickness channel body: 4 mm  
 Material thickness vertical base: 5 mm  
 Steel grating width: 250 mm

## DESIGNS

| ARTICLE NO.   | CHANNEL HEIGHT (h) | RECESS (BxT) |
|---------------|--------------------|--------------|
| ALK.8.250/90  | 90 mm              | 510 x 20 mm  |
| ALK.8.250/120 | 120 mm             | 510 x 20 mm  |
| ALK.8.250/150 | 150 mm             | 510 x 20 mm  |

Special heights on request.

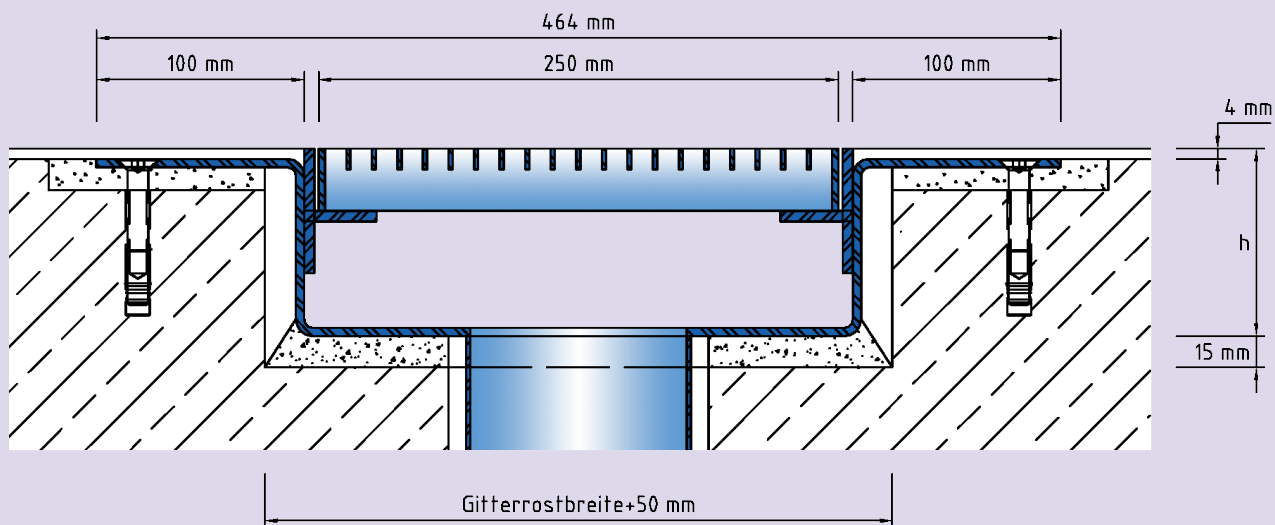

ALK.8.250

Subject to technical change without notice.