


# ALR.8.200/..

- high load-bearing capacity
- with coating-flange

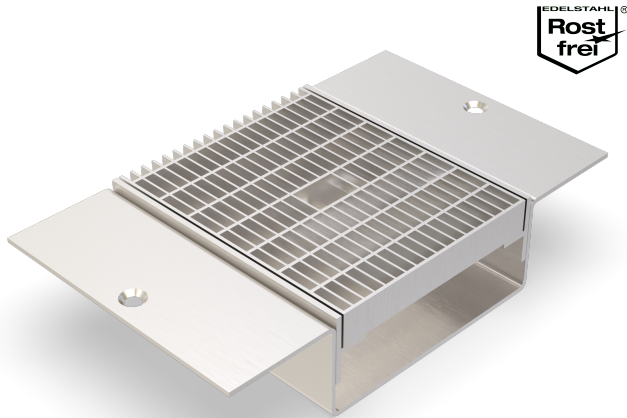

**FEATURES**

permanently tight, corrosion-resistant, high flexibility (variable lengths, heights and widths), grating with mesh size 30x10 mm (30x30 mm on request), grid lock inclusive

**APPLICATIONS**

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

**MATERIAL**

hot-dip galvanised steel, stainless steel V2A (V4A on request)

**COVERING TYPES**

coating

**TRAFFICABILITY**

passenger cars (trucks on request)

**FORMED PARTS**

corner piece, T-piece, cross piece, channel end piece (flange all around or upstand), channel drain

**NOTES**


The individual channel elements are tightly welded together during installation on site.  
 For stainless steel, the general cleaning and care instructions must be observed (see also download area).  
 Installation by our own fitters recommended.

**TECHNICAL DATA**

Material thickness channel body:	4 mm
Material thickness mounting bracket:	5 mm
Supply length:	3 mtr
Steel grating width:	200 mm

**DESIGNS**

ARTICLE NO.	CHANNEL HEIGHT (h)	RECESS (BxT)
ALR.8.200/50	50 mm	260 x 65 mm
ALR.8.200/60	60 mm	260 x 75 mm
ALR.8.200/90	90 mm	260 x 105 mm
ALR.8.200/120	120 mm	260 x 135 mm
ALR.8.200/160	160 mm	260 x 175 mm

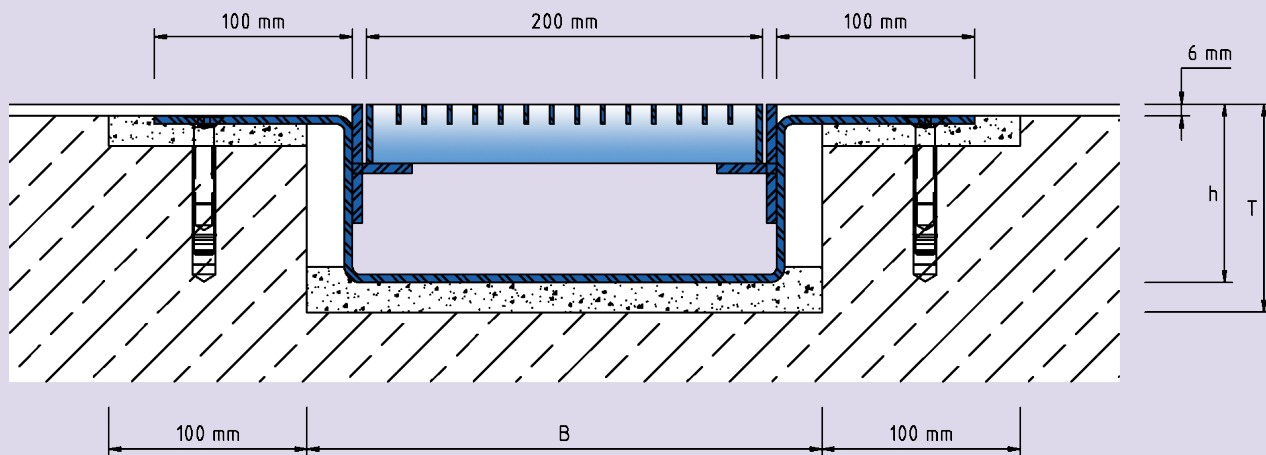

ALR.8.200

Subject to technical change without notice.