



BAL.2.

- high load-bearing capacity
- with adhering flange



FEATURES

resistant to heavy loads, permanently tight, corrosion-resistant, high flexibility (variable heights and widths), Slotted grate lock included, drain pipe DN100, length 200 mm

APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

COVERING TYPES

asphalt, screed, bitumen welding membrane, liquid plastic

TRAFFICABILITY

passenger cars (trucks on request)

NOTES

Drainage slots are possible (on request).

For stainless steel, the general cleaning and care instructions must be observed (see also download area).

Flange also available as square.

Also available in 8 mm and 10 mm thickness.

Floor drains are also available with a dirt trap.


TECHNICAL DATA

Material thickness adhering flange: 4 mm

DESIGNS

ARTICLE NO.	HEIGHT (h)	RECESS (BxT)
BAL.2.100/49	49 mm	380 x 20 mm
BAL.2.125/49	49 mm	400 x 20 mm
BAL.2.150/49	49 mm	430 x 20 mm

Special heights on request.

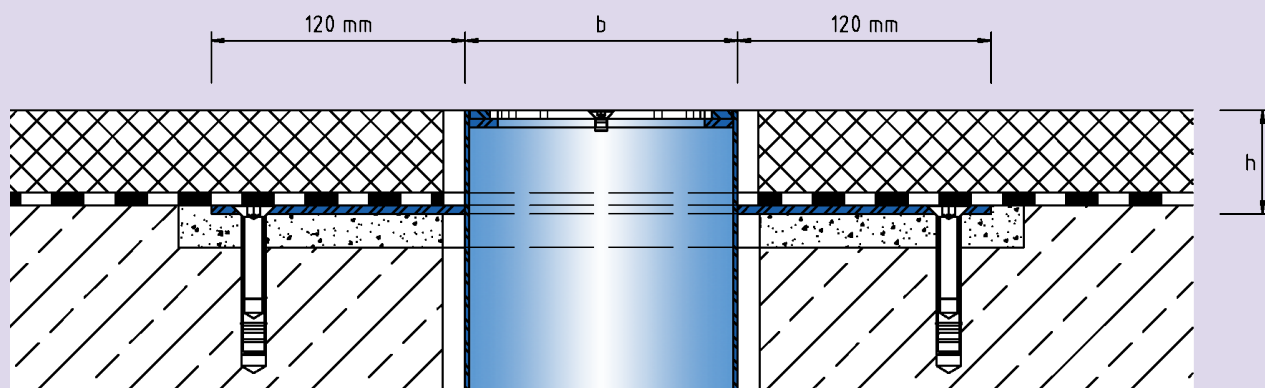

BAL.2.

Subject to technical change without notice.