


BTP1/..

- load transfer through flat steel dowels
- with loose/fixed flange
- with coating-flange

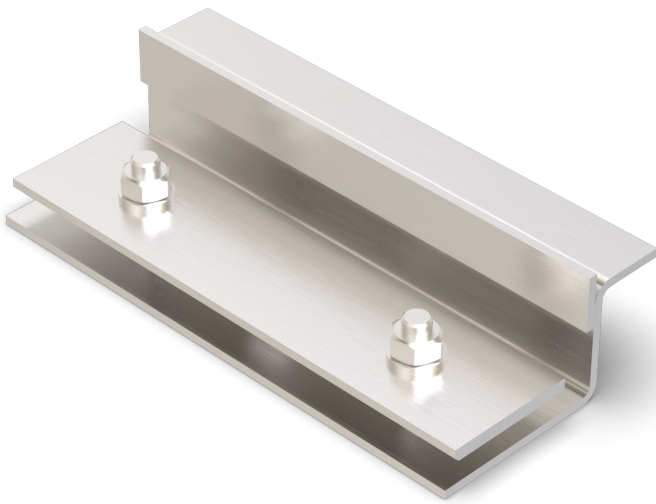

FEATURES

high edge protection due to steel edges $t=10$ mm

APPLICATIONS

parking decks, parking garages, underground garages, ramp crossings, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports, residential, office and administration buildings

MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

COVERING TYPES

asphalt, coating, screed, natural and stone slabs, bitumen welding membrane, liquid plastic

TRAFFICABILITY

passenger cars, trucks, fork-lifts

FORMED PARTS

corner piece, end plate

NOTES

Support leg perforated and lowered.

Adhesive flange joints must be fully welded and ground flat on the sealing side.


TECHNICAL DATA

Material/sheet thickness: 4 mm
Supply length: 3 mtr

DESIGNS

ARTICLE NO.	HEIGHT (h)	RECESS (BxT)
BTP1/50	50 mm	110 x 20 mm
BTP1/60	60 mm	110 x 20 mm
BTP1/70	70 mm	110 x 20 mm
BTP1/80	80 mm	110 x 20 mm

Special heights on request.

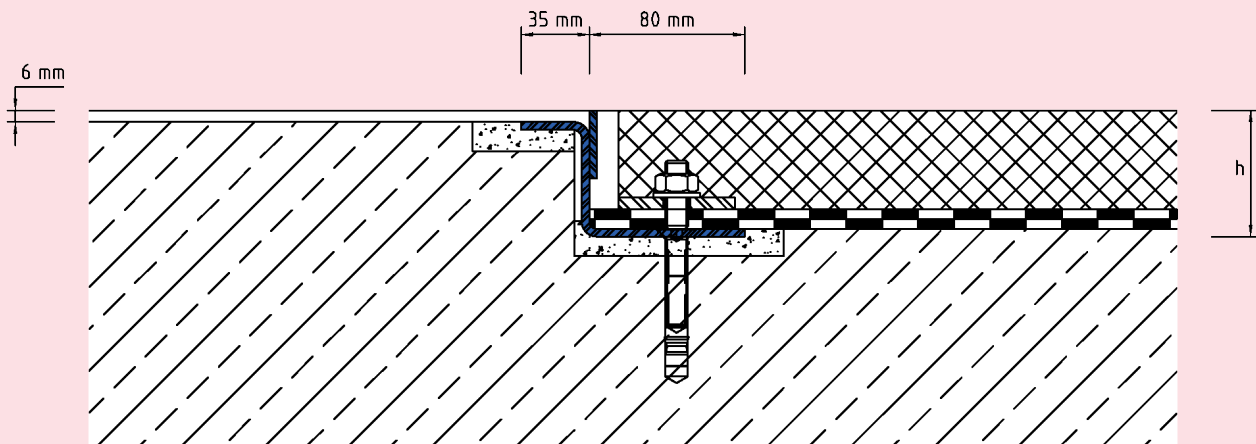

BTP1

Subject to technical change without notice.