

## D.S.T.-Fugendübel

- high load-bearing capacity
- continuous load transfer

### FEATURES

The joint dowel for screeds prevents deformation, height offset and uncontrollable cracks in shrinkage and expansion joints, even with floating screeds.

### APPLICATIONS

residential, office and administration buildings


### COVERING TYPES

screed, screed with upper layer from linoleum, rubber or carpet

### NOTES

Steel quality: St 37

The complete plastic coating ensures gliding properties during shrinkage in both directions.

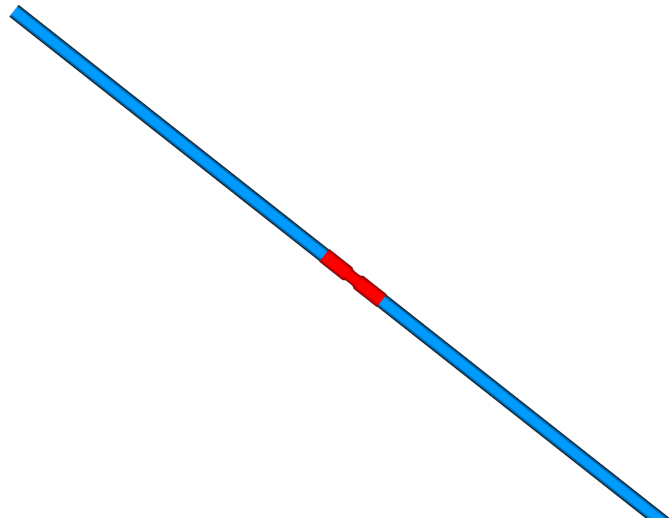


### TECHNICAL DATA

Thickness: 4 mm  
Length: 300 mm

### DESIGNS

ARTICLE NO.  
D.S.T.-Fugendübel

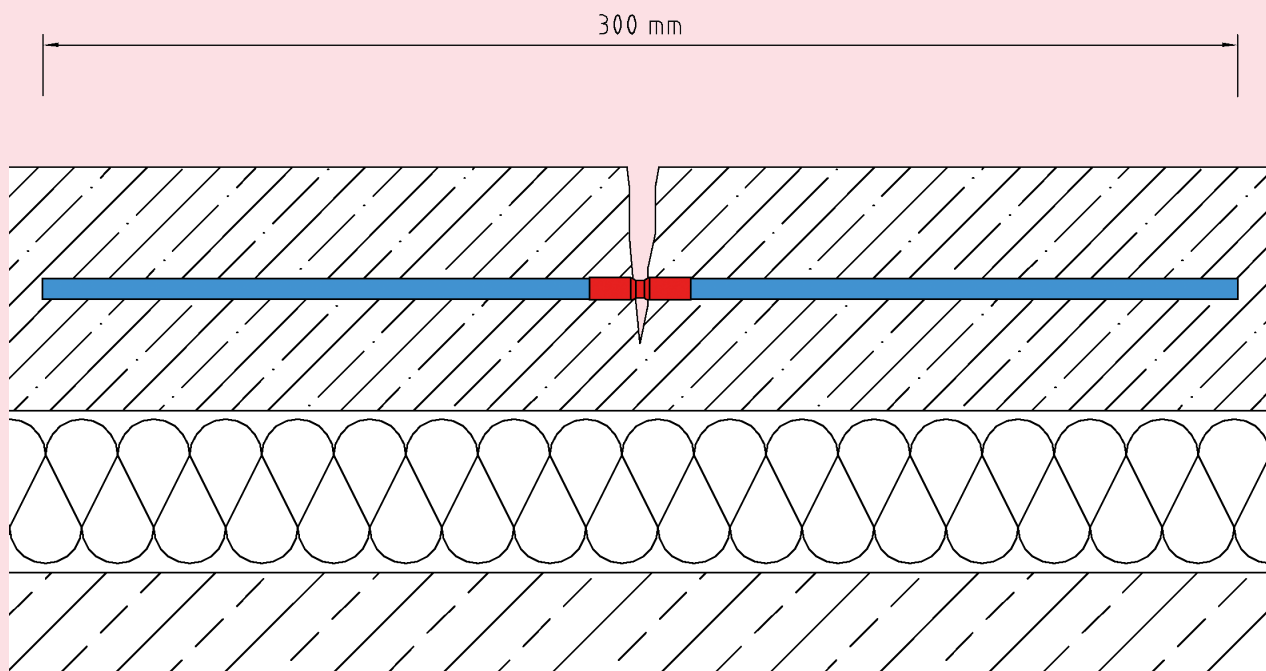

D.S.T.-Fugendübel

Subject to technical change without notice.