

D.S.T.-Fugendübel

- high load-bearing capacity
- continuous load transfer

FEATURES

The joint dowel for screeds prevents deformation, height offset and uncontrollable cracks in shrinkage and expansion joints, even with floating screeds.

APPLICATIONS

residential, office and administration buildings


COVERING TYPES

screed, screed with upper layer from linoleum, rubber or carpet

NOTES

Steel quality: St 37

The complete plastic coating ensures gliding properties during shrinkage in both directions.

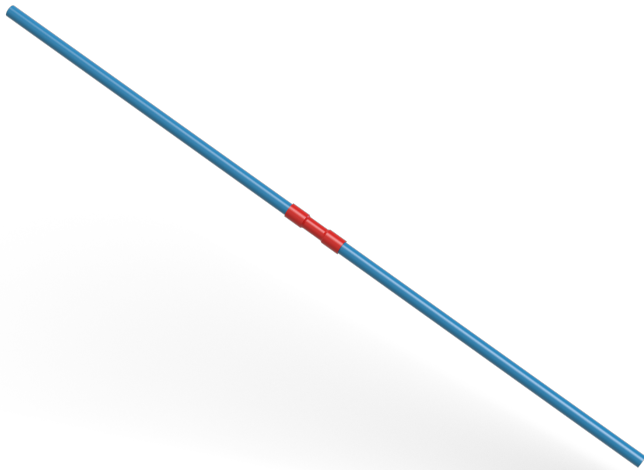


TECHNICAL DATA

Thickness: 4 mm
Length: 300 mm

DESIGNS

ARTICLE NO.
D.S.T.-Fugendübel

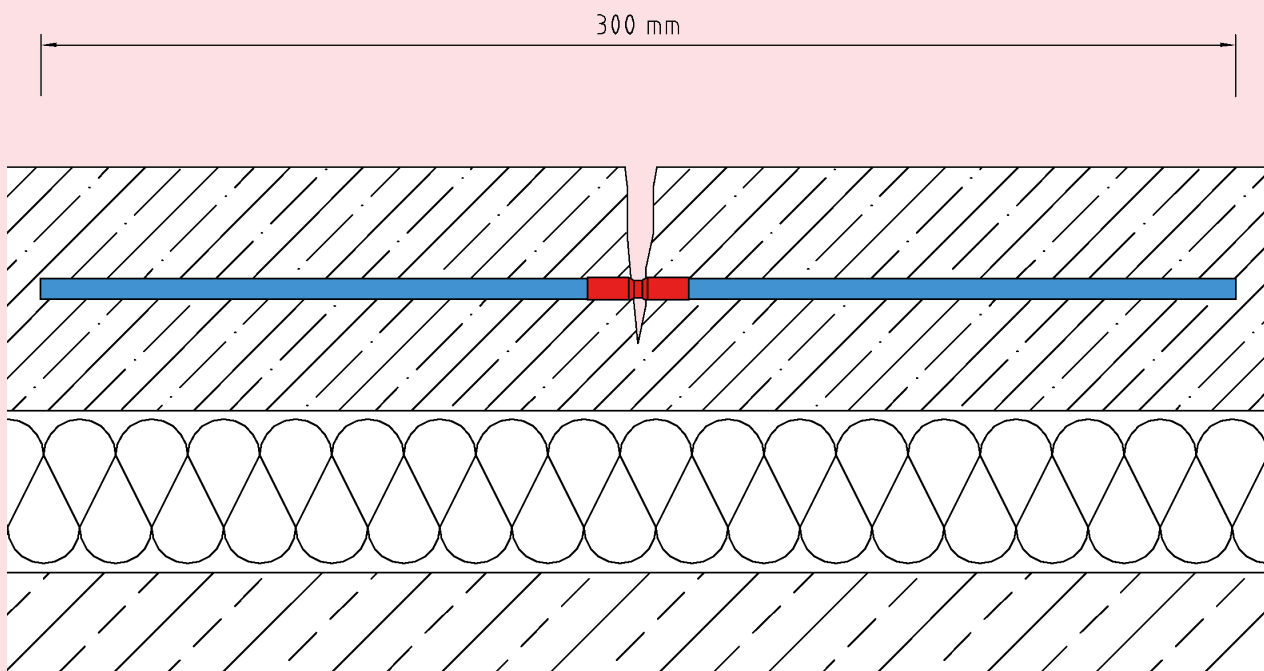

D.S.T.-Fugendübel

Subject to technical change without notice.