

FLR.4.120/..

- car-trafficable
- low installation height
- with coating-flange



FEATURES

permanently tight, corrosion-resistant, slot width 35x6 mm, Schlitzrostarretierung inklusive

APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls, residential, office and administration buildings

MATERIAL

stainless steel V2A (V4A on request)

COVERING TYPES

coating, screed, industrial coverings

TRAFFICABILITY

passenger cars

FORMED PARTS

corner piece, T-piece, cross piece, channel end piece (flange all around or upstand), channel drain

NOTES

The individual channel elements are tightly welded together during installation on site.

For stainless steel, the general cleaning and care instructions must be observed (see also download area).


Installation by our own fitters recommended.

TECHNICAL DATA

Material/sheet thickness: 3 mm
 Supply length: 3 mtr
 Slotted grating width: 120 mm

DESIGNS

ARTICLE NO.	CHANNEL HEIGHT (h)	RECESS (BxT)
FLR.4.120/32	32 mm	290 x 45 mm

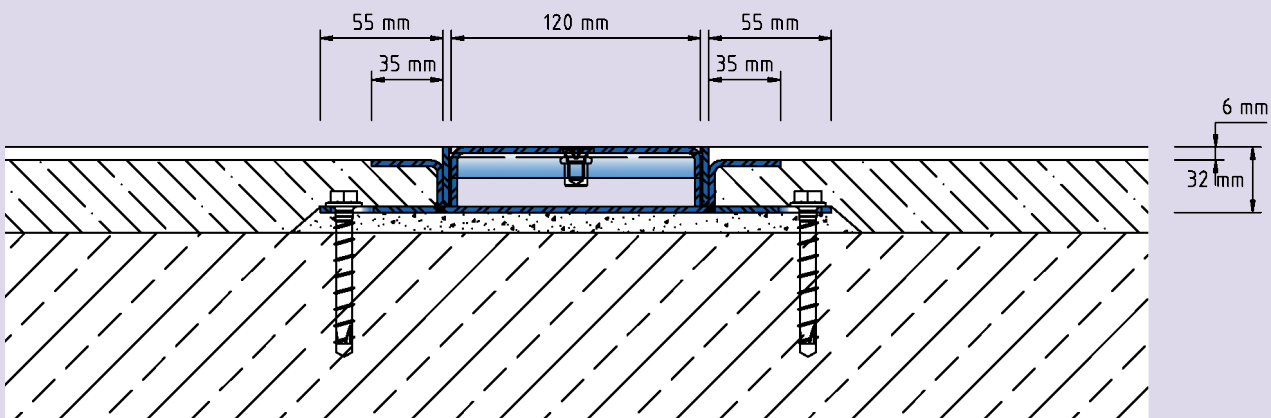

FLR.4.120

Subject to technical change without notice.