

Fugenband BF20

- **sealing membrane approved by the building authorities**
- **three-dimensional absorption of movements**

FEATURES

watertight, weather- and temperature-resistant (-40°C to +120°C), resistant to de-icing salt and waste water (alkalis, microbes, bacteria)

MATERIAL

joint tape BF20 made of EPDM with lateral bonding flanges made of non-combustible fleece on the top and bottom sides

COVERING TYPES

asphalt, pavement, earth-covered areas


FORMED PARTS

end piece, corner piece, T-piece, cross piece

NOTES

Joint tape BF is suitable for the installation with bituminous waterproofing, synthetic resin adhesive and liquid synthetic sealant. Formed parts and joint tape connections are connected by vulcanization.

The joint tape is a product of the BBF ElastoFug joint tape systems.

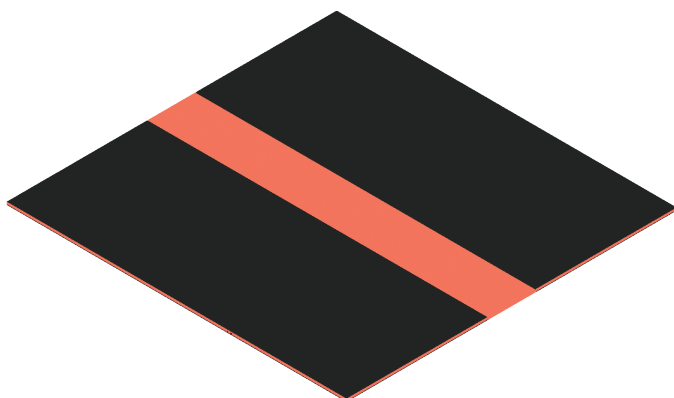


TECHNICAL DATA

Movement horizontal:	40 mm (±20 mm)
Movement vertical:	40 mm (±20 mm)
Movement along the joint	40 mm (±20 mm)
Total width:	355 mm
Maximal joint width:	40 mm
Supply length:	25 mtr
Thickness:	2,5 mm

DESIGNS

ARTICLE NO.

Fugenband BF20

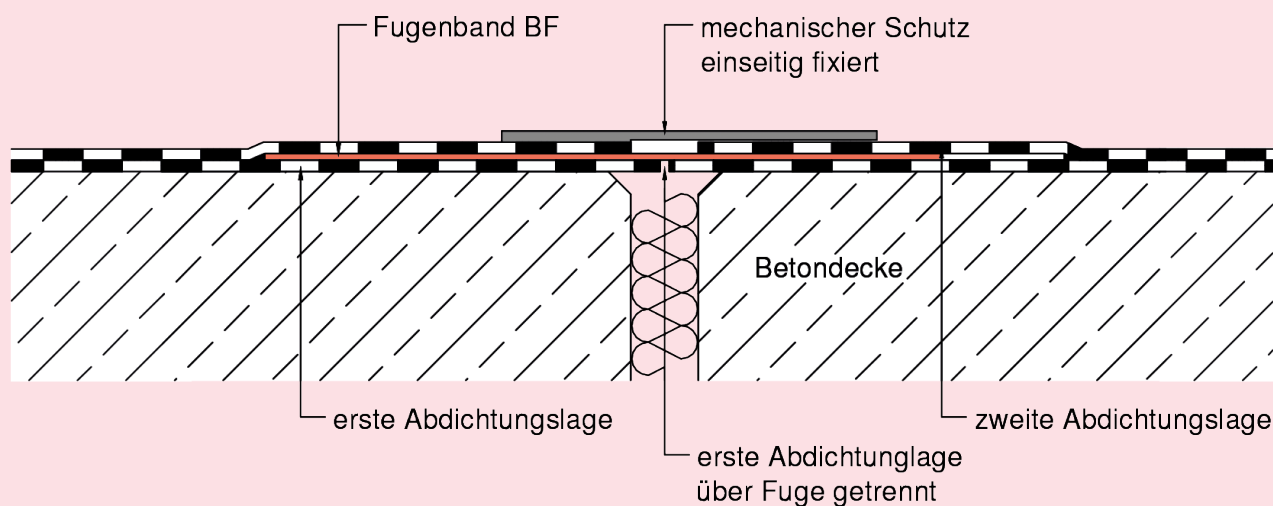

Fugenband BF20

Subject to technical change without notice.