



Fugenband BF20

- sealing insert approved by the building authorities
- three-dimensional absorption of movements

FEATURES

watertight, weather and temperature resistant (-40°C bis +120°C), resistant to salt and waste-water (alcalics, microbes, bacteria)

MATERIAL

joint tape (EPDM)

COVERING TYPES


asphalt, Pavement, green roof coverings

FORMED PARTS

end piece, corner piece, T piece, cross piece

NOTES

Joint tape BF is suitable for the installation with bituminous waterproofing, synthetic resin adhesive and liquid synthetic sealant. Moulded parts and joint tape connections are vulcanized. The joint tape is a product of BBF ElastoFug joint tape systems.

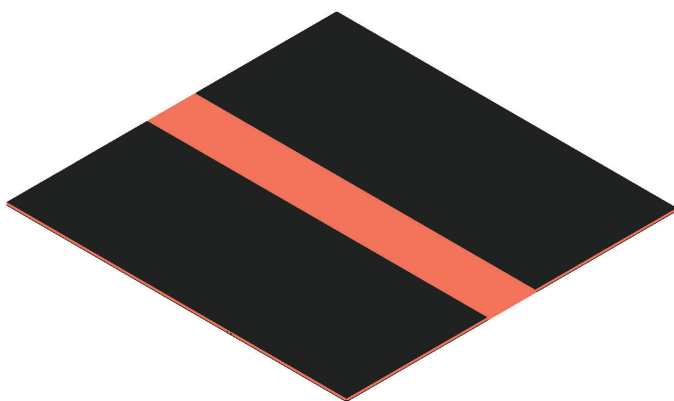


Technical data

Movement horizontal:	40 mm (± 20 mm)
Movement vertical:	40 mm (± 20 mm)
Movement a long the joint	40 mm (± 20 mm)
Total width:	355 mm
Maximal joint width:	40 mm
Supply length:	25 mtr
Thickness:	2,5 mm

Designs

Article No.

Fugenband BF20

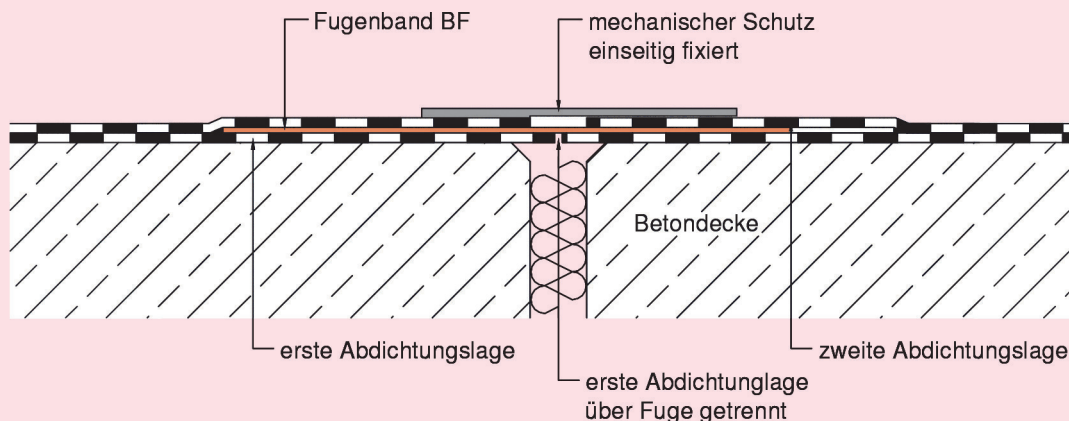

Subject to technical change without notice.

Fugenband BF20