

KDF..

- cable fairlead
- non-insulated structure
- with loose/fixed flange

APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

COVERING TYPES

asphalt, concrete, screed

NOTES

Threaded bolt M12x35 mm




TECHNICAL DATA

Material thickness fixed flange: 8 mm
 Material thickness loose flange: 6 mm

DESIGNS

ARTICLE NO.	HEIGHT (h)	PIPE Ø
KDF34	400 mm	33.7 mm
KDF48	400 mm	48.3 mm

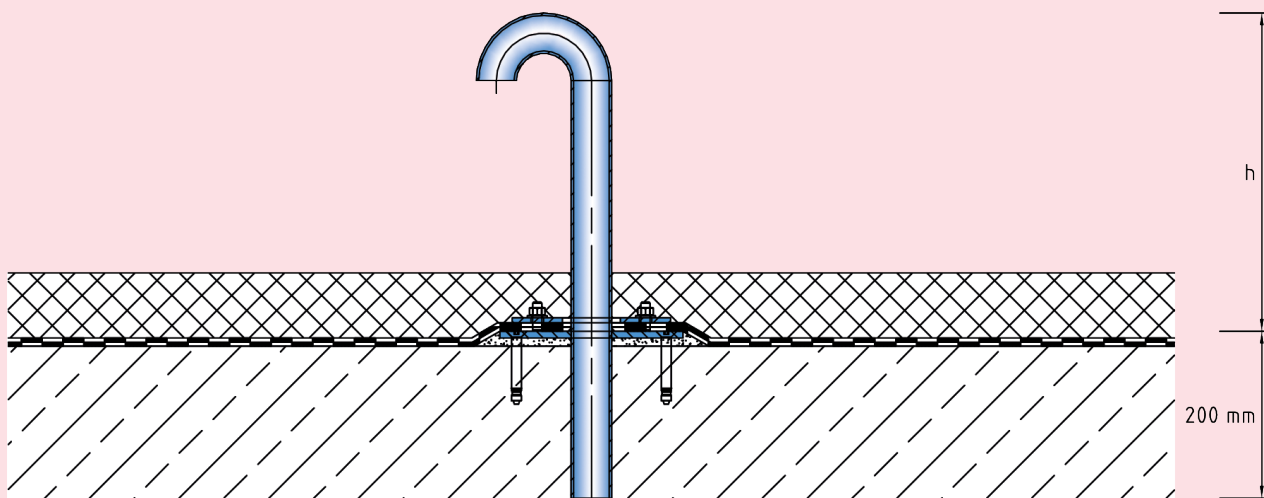

KDF..

Subject to technical change without notice.