KDF..

- cable fairlead
- with loose/fixed flange
- non-insulated structure

APPLICATIONS
parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL
hot-dip galvanised steel, stainless steel V2A (V4A on request)

COVERING TYPES
asphalt, concrete, screed, bitumen welding membrane

NOTES
Threaded bolt M12x35 mm

TECHNICAL DATA

Material thickness fixed flange:	8 mm
Material thickness loose flange:	6 mm

DESIGNS

ARTICLE NO.	HEIGHT (h)	PIPE Ø
KDF34	400 mm	33.7 mm
KDF48	400 mm	48.3 mm

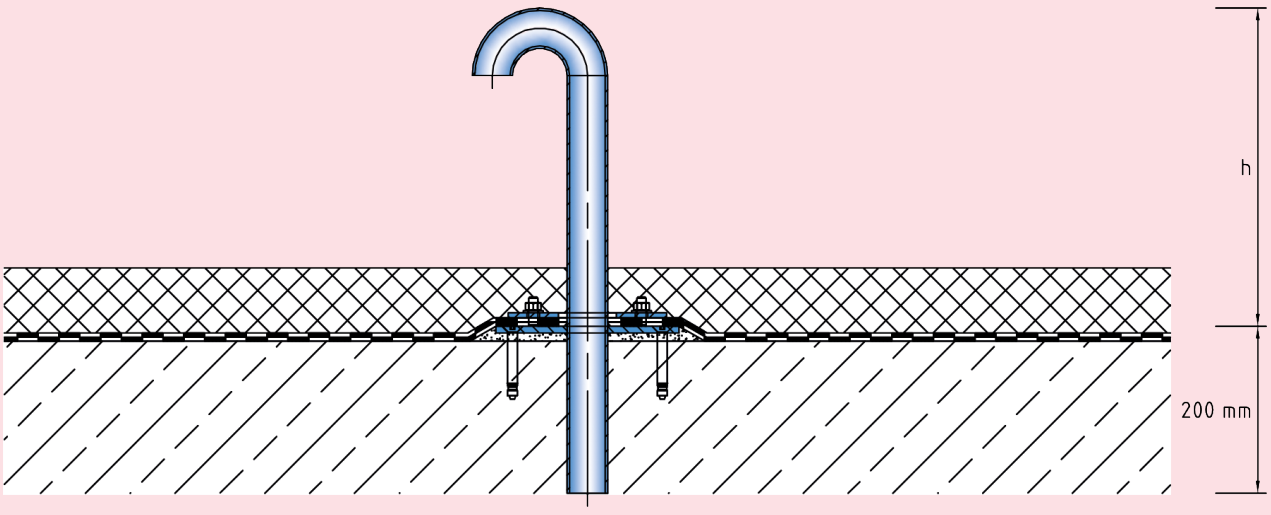

KDF..

Subject to technical change without notice.