

KMR.4.100/38

- high load-bearing capacity
- low installation height
- with coating-flange

FEATURES

resistant to heavy loads, abrasion-, weather- and temperature-resistant (-40°C to +120°C), resistant to de-icing salt and waste water (alkalis, microbes, bacteria), permanently tight, corrosion-resistant

APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

stainless steel V2A (V4A on request), EPDM insert

COVERING TYPES

coating, screed, industrial coverings

TRAFFICABILITY

D400


FORMED PARTS

corner piece, T-piece, cross piece, channel end piece (flange all around or upstand), channel drain

NOTES

The individual channel elements are tightly welded together and the EPDM insert is installed during the installation process on the construction site.

Installation by our own fitters recommended.

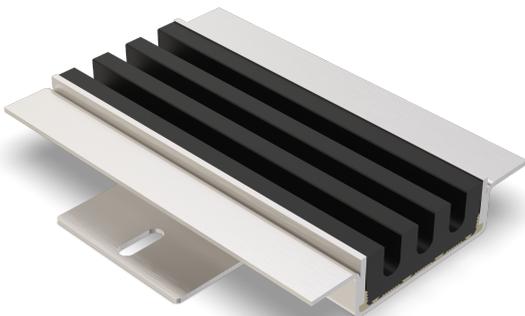


TECHNICAL DATA

Material thickness of coating flange: 3 mm
 Material thickness vertical base: 4 mm
 Supply length: 3 mtr
 Comb channel width: 100 mm

DESIGNS

ARTICLE NO.	CHANNEL HEIGHT (h)	RECESS (BxT)
KMR.4.100/38	38 mm	270 x 48 mm

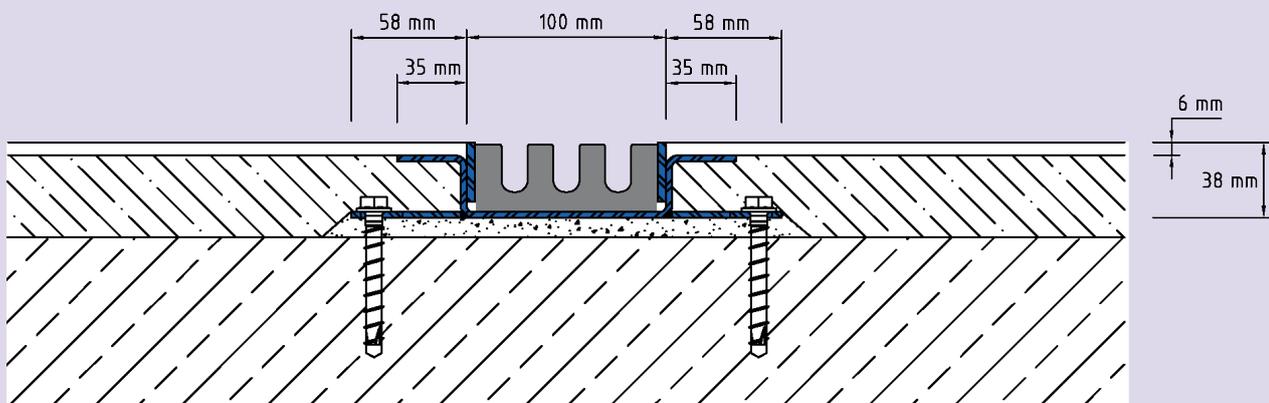

KMR.4.100

Subject to technical change without notice.