

# KMR.5.100/38

- high load-bearing capacity
- low installation height

## FEATURES

resistant to heavy loads, abrasion-, weather- and temperature-resistant (-40°C to +120°C), resistant to de-icing salt and waste water (alkalis, microbes, bacteria), permanently tight, corrosion-resistant

## APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

## MATERIAL

stainless steel V2A (V4A on request), EPDM insert

## COVERING TYPES

coating, screed, industrial coverings

## TRAFFICABILITY

D400

## FORMED PARTS

corner piece, T-piece, cross piece, channel end piece (end plate welded in at the front), channel drain

## NOTES

The individual channel elements are tightly welded together and the EPDM insert is installed during the installation process on the construction site.

Installation by our own fitters recommended.




## TECHNICAL DATA

Material thickness channel body: 3 mm  
 Supply length: 3 mtr  
 Comb channel width: 98 mm

## DESIGNS

ARTICLE NO.	CHANNEL HEIGHT (h)	RECESS (BxT)
KMR.5.100/38	38 mm	210 x 48 mm

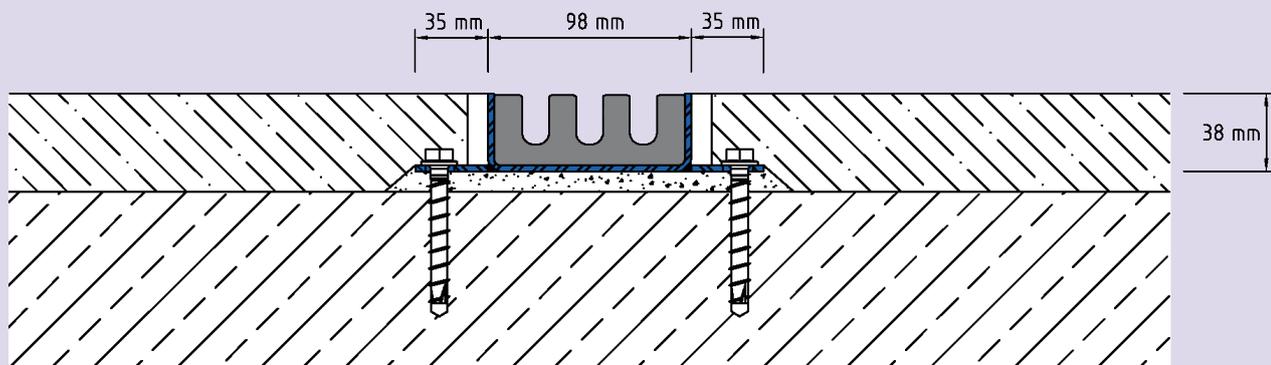

KMR.5.100

Subject to technical change without notice.