

LFK3/..

- with loose/fixed flange
- covering separation
- edge termination

FEATURES

high edge protection, professional coating separation

APPLICATIONS

parking decks, parking garages, underground garages, ramp crossings, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports

MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

COVERING TYPES

asphalt, concrete, screed

FORMED PARTS

end piece, corner piece, T-piece, cross piece


NOTES

The position of the loose flange (60x6 mm) can be positioned as required (horizontally or vertically on the inside or outside).

Threaded bolt M12x35 mm with washer and nut, e=150 mm

Loose flange according to DIN, l=1500 mm

Solid flange joints should be fully welded through and ground flat on the sealing side.

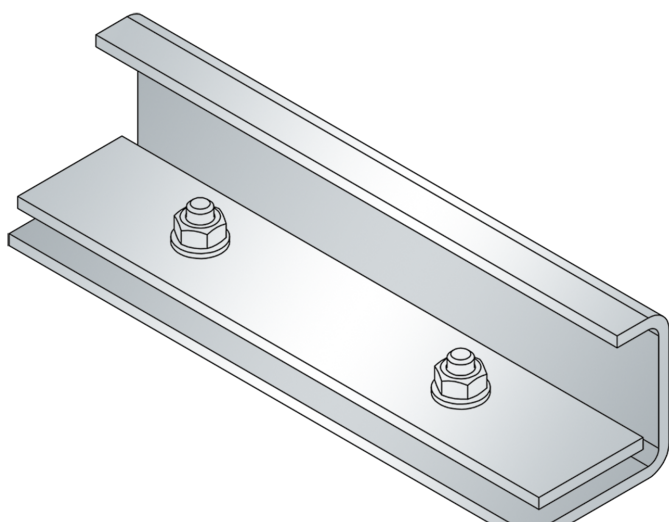


TECHNICAL DATA

Material/sheet thickness: 6 mm
Supply length: 3 mtr

DESIGNS

ARTICLE NO.	HEIGHT (h)	RECESS (BxT)
LFK3/60	60 mm	120 x 20 mm
LFK3/80	80 mm	120 x 20 mm
LFK3/100	100 mm	120 x 20 mm

Special heights on request.

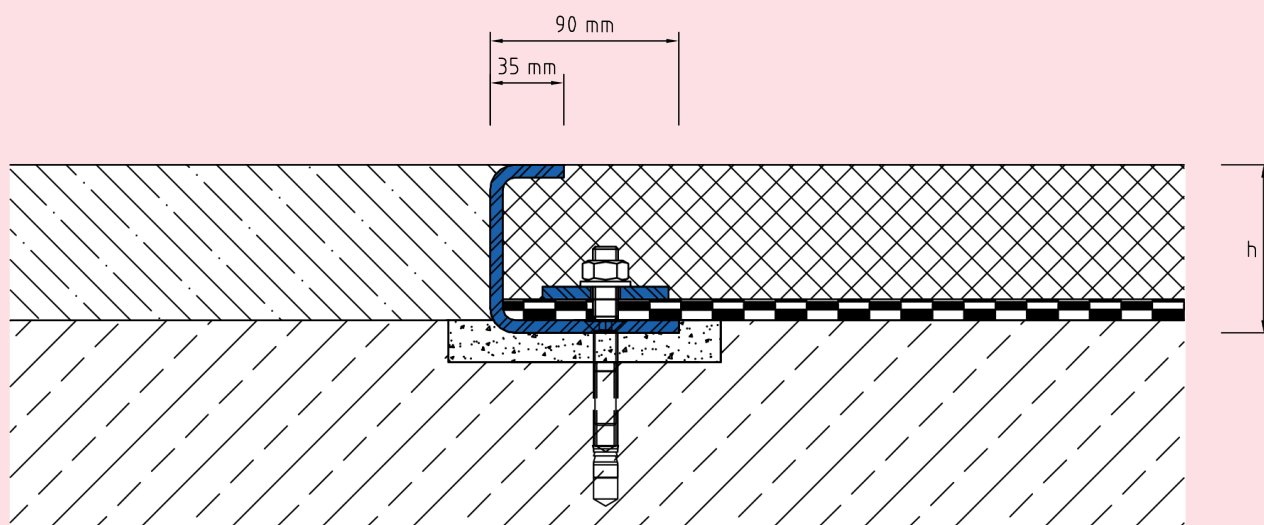

Subject to technical change without notice.