

LFK4/..

- covering separation
- edge termination
- with loose/fixed flange

FEATURES

high edge protection, professional coating separation

APPLICATIONS

parking decks, parking garages, underground garages, ramp crossings, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports

MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

COVERING TYPES

asphalt, concrete, screed

TRAFFICABILITY

passenger cars, trucks, fork-lifts


FORMED PARTS

corner piece, T-piece, cross piece, end piece

NOTES

Threaded bolt M12x35 mm with washer and nut, e=150 mm
Specification of profile height (h) from the lower edge of the loose flange.

Solid flange joints should be fully welded through and ground flat on the sealing side.

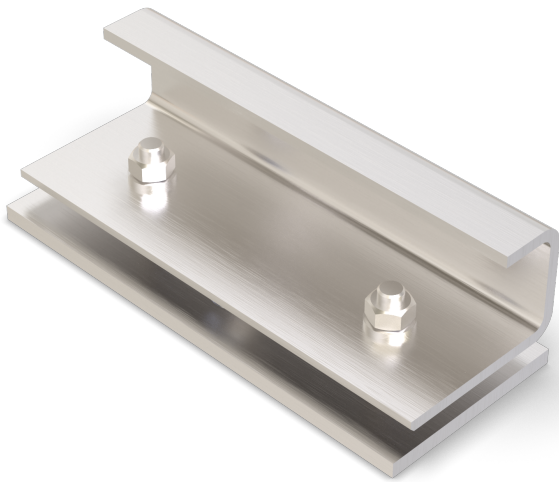


TECHNICAL DATA

Material thickness fixed flange: 8 mm
Material thickness loose flange: 6 mm
Supply length: 3 mtr

DESIGNS

| ARTICLE NO. | HEIGHT (h) | RECESS (BxT) |
|-------------|------------|--------------|
| LFK4/50 | 50 mm | 140 x 20 mm |
| LFK4/60 | 60 mm | 140 x 20 mm |
| LFK4/80 | 80 mm | 140 x 20 mm |

Special heights on request.

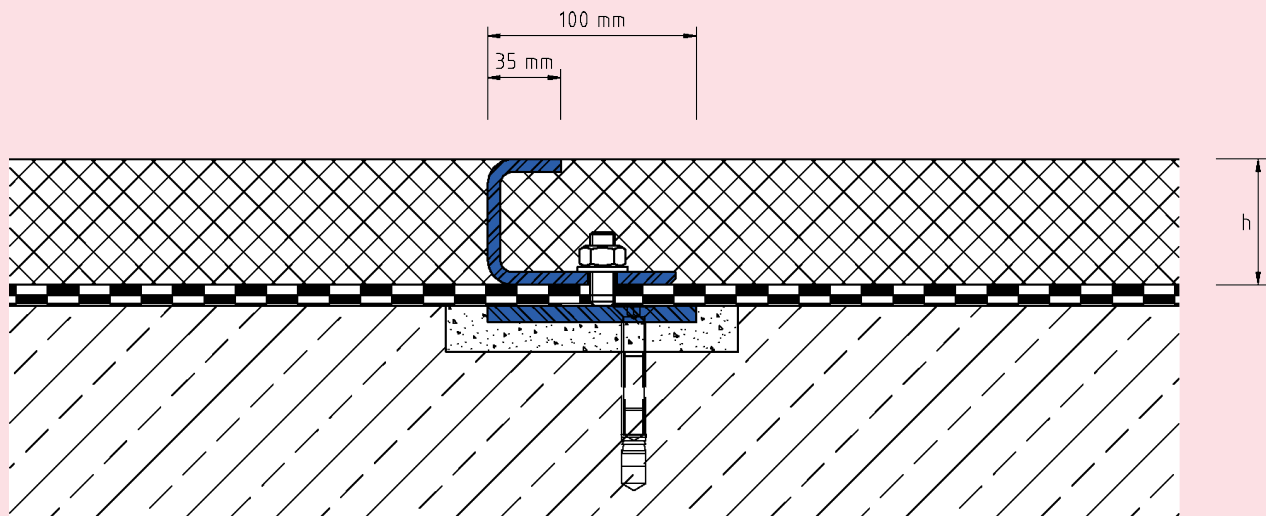

LFK4

Subject to technical change without notice.