

LFK7/..

- covering separation
- edge termination
- with loose/fixed flange

FEATURES

high edge protection, professional coating separation

APPLICATIONS

parking decks, parking garages, underground garages, ramp crossings, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports

MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

COVERING TYPES

asphalt, concrete, screed

TRAFFICABILITY


passenger cars, trucks, fork-lifts

FORMED PARTS

corner piece, T-piece, cross piece, end piece

NOTES

The position of the loose flange (60x6 mm) can be positioned as required (horizontally or vertically on the inside or outside).
 Threaded bolt M12x35 mm with washer and nut, e=150 mm
 Loose flange according to DIN, l=1500 mm
 Solid flange joints should be fully welded through and ground flat on the sealing side.

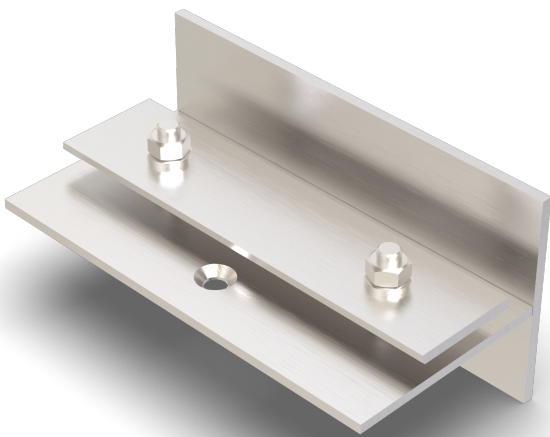


TECHNICAL DATA

Material/sheet thickness: 6 mm
 Supply length: 3 mtr

DESIGNS

ARTICLE NO.	HEIGHT (h)	RECESS (BxT)
LFK7/60	60 mm	140 x 20 mm
LFK7/80	80 mm	140 x 20 mm
LFK7/100	100 mm	140 x 20 mm

Special heights on request.

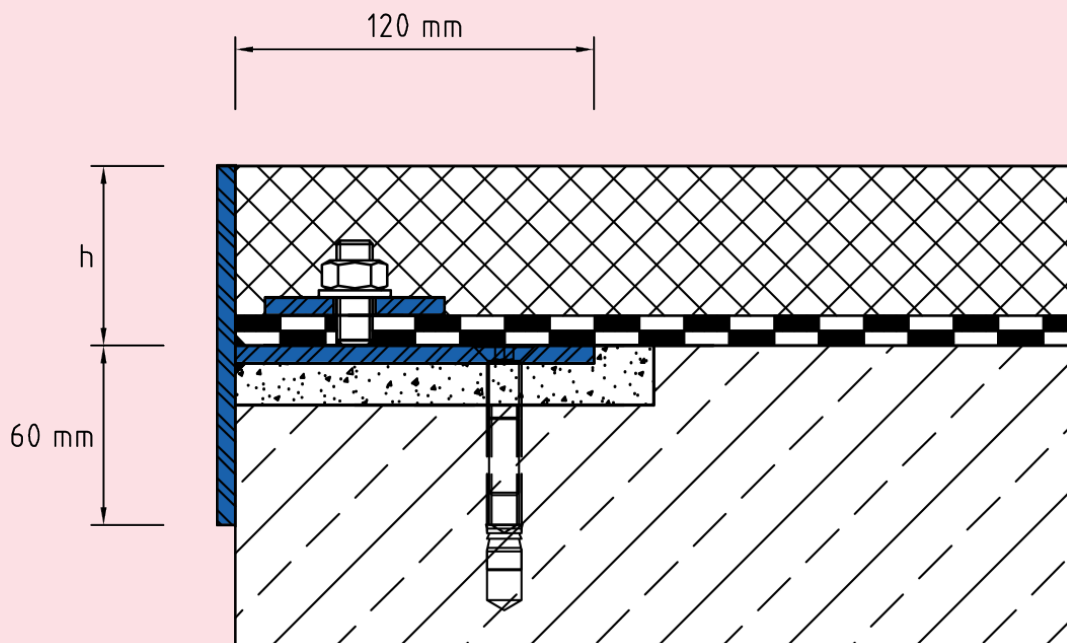

LFK7

Subject to technical change without notice.