


LFK8/..

- covering separation
- with double loose/fixed flange

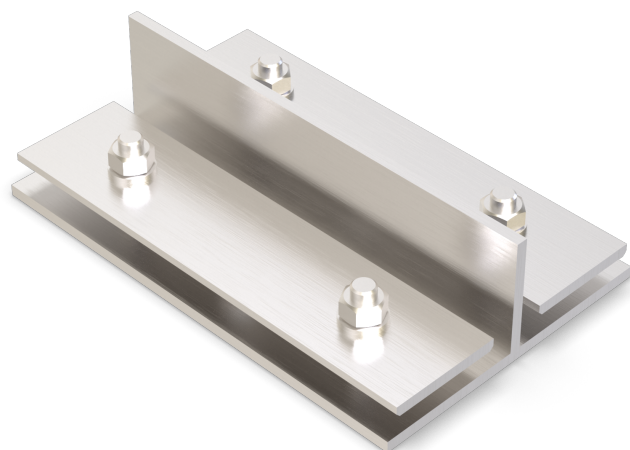

FEATURES

high edge protection, professional coating separation

APPLICATIONS

parking decks, parking garages, underground garages, ramp crossings, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports

MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

COVERING TYPES

asphalt, concrete, screed

TRAFFICABILITY

passenger cars, trucks, fork-lifts

FORMED PARTS

corner piece, T-piece, cross piece, end piece

NOTES

Threaded bolt M12x35 mm with washer and nut, e=150 mm

Loose flange according to DIN, l=1500 mm

Solid flange joints should be fully welded through and ground flat on the sealing side.


TECHNICAL DATA

Material/sheet thickness: 6 mm
Supply length: 3 mtr

DESIGNS

ARTICLE NO.	HEIGHT (h)	RECESS (BxT)
LFK8/60	60 mm	200 x 20 mm
LFK8/80	80 mm	200 x 20 mm
LFK8/100	100 mm	200 x 20 mm

Special heights on request.

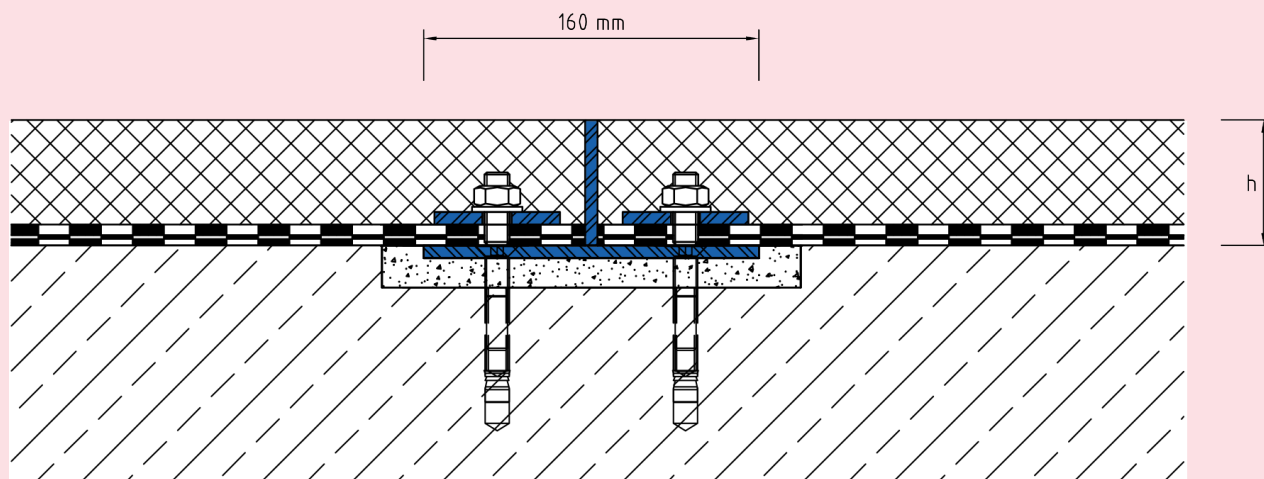

LFK8

Subject to technical change without notice.