




## PSA.8.200-200/..

- high load-bearing capacity
- with coating-flange

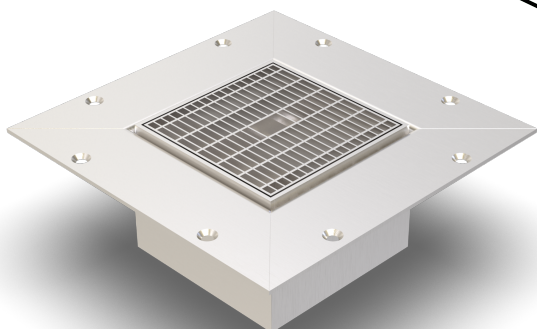

### FEATURES

resistant to heavy loads, permanently tight, corrosion-resistant, high flexibility (variable heights and widths), mesh size grating in 30x10 mm (30x30 mm on request), grid lock inclusive

### APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

### MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

### COVERING TYPES

coating

### TRAFFICABILITY

passenger cars (trucks on request)

### NOTES

Connection to drain channel possible.

Bottom tray optionally available (on request).

For stainless steel, the general cleaning and care instructions must be observed (see also download area).

Other dimensions are available:

Item no.


- PSA.8.300-300/10
- PSA.8.400-400/10
- PSA.8.500-500/10
- PSA.8.600-600/10
- PSA.8.800-800/10
- PSA.8.1000-1000/10
- PSA.8.1200-1200/10

### TECHNICAL DATA

Material thickness vertical base:	5 mm
Material thickness mounting bracket:	5 mm
Steel grating width:	200 mm

### DESIGNS

ARTICLE NO.	CHANNEL HEIGHT (h)	RECESS (BxT)
PSA.8.200-200/9	9 mm	480 x 20 mm

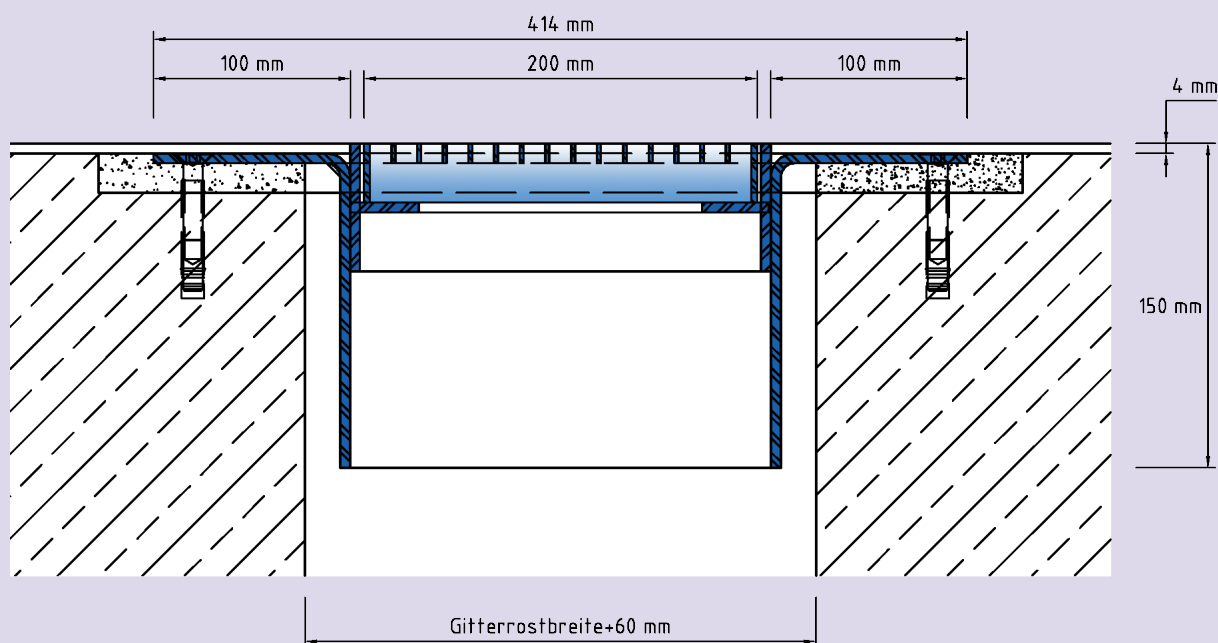

Subject to technical change without notice.

PSA.8.200-200