



MORE FITTING PARTS

RDF..

- pipe fairlead
- with loose/fixed flange
- non-insulated structure

APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL


hot-dip galvanised steel (stainless steel V2A and V4A on request)

COVERING TYPES

asphalt, concrete, screed, bitumen welding membrane

NOTES

Threaded bolt M12x35 mm

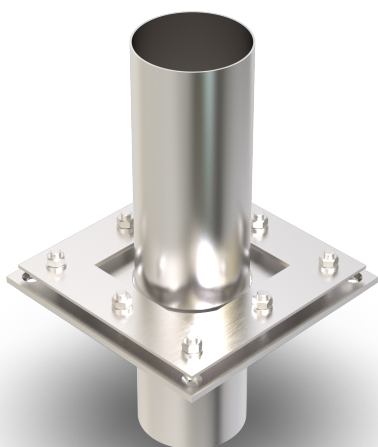


TECHNICAL DATA

Material thickness fixed flange: 8 mm
Material thickness loose flange: 6 mm

DESIGNS

ARTICLE NO.	HEIGHT (h)	PIPE Ø
RDF48	300 mm	48.3 mm
RDF76	300 mm	76.1 mm
RDF108	300 mm	108 mm
RDF133	300 mm	133 mm
RDF159	300 mm	159 mm
RDF168	300 mm	168.3 mm
RDF219	300 mm	219.1 mm
RDF273	300 mm	273 mm
RDF323	300 mm	323.9 mm

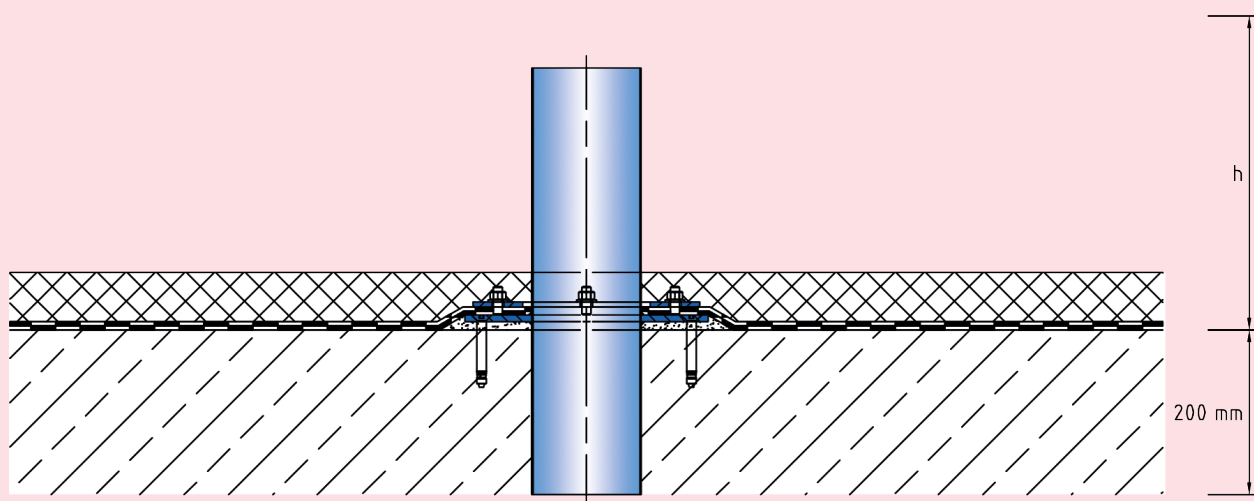

Subject to technical change without notice.