

RDF.. WD

- pipe fairlead
- insulated structure
- with loose/fixed flange

APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL


hot-dip galvanised steel (stainless steel V2A and V4A on request)

COVERING TYPES

asphalt, concrete, screed

NOTES

Threaded bolt M12x35 mm

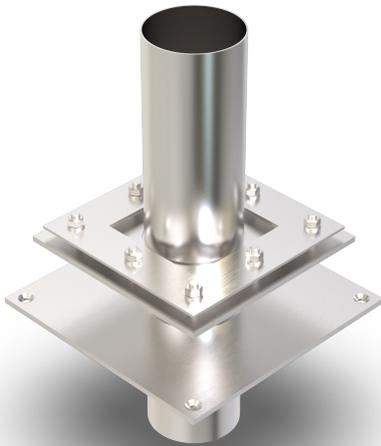


TECHNICAL DATA

Material thickness fixed flange: 8 mm
 Material thickness loose flange: 6 mm

DESIGNS

ARTICLE NO.	HEIGHT (h)	PIPE Ø
RDF48 WD	300 mm	48.3 mm
RDF76 WD	300 mm	76.1 mm
RDF108 WD	300 mm	108 mm
RDF133 WD	300 mm	133 mm
RDF159 WD	300 mm	159 mm
RDF168 WD	300 mm	168.3 mm
RDF219 WD	300 mm	219.1 mm
RDF273 WD	300 mm	273 mm
RDF323 WD	300 mm	323.9 mm

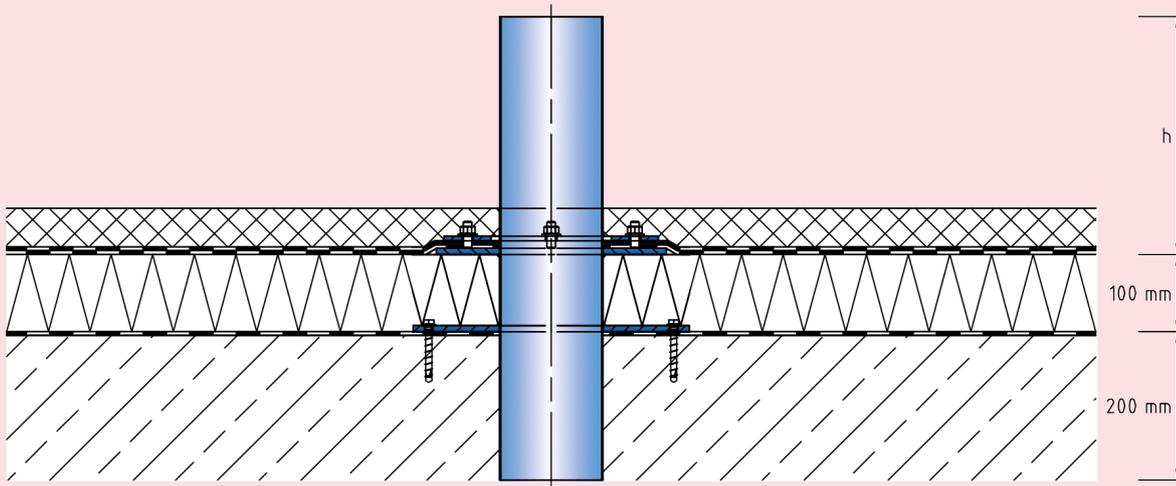

RDF.. WD

Subject to technical change without notice.