



## VA.12.8/..

- high edge protection
- visually appealing
- can be sanded without smearing effects

### FEATURES

perforated bearing legs guarantee the best connection to the substrate/covering

### APPLICATIONS

shopping centres, railway stations, airports, residential, office and administration buildings

### MATERIAL


stainless steel V2A, K/VA foam material in the central section

### COVERING TYPES

screed, natural and stone slabs, terrazzo covering

### FORMED PARTS

corner piece, T-piece, cross piece

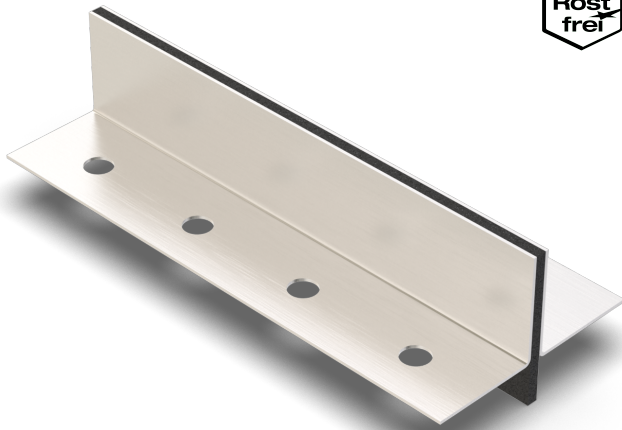


### TECHNICAL DATA

Movement horizontal:	2 mm ( $\pm 1$ mm)
Visible width:	8 mm
Material/sheet thickness:	1,5 mm
Load rating:	wheel load 400 kg up to $\varnothing$ 150 mm, B = 100 mm
Supply length:	3 mtr
Color of expansion insert:	schwarz

### DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)
VA.12.8/30	30 mm
VA.12.8/40	40 mm
VA.12.8/50	50 mm
VA.12.8/60	60 mm
VA.12.8/70	70 mm
VA.12.8/80	80 mm
VA.12.8/100	100 mm

Special heights on request.

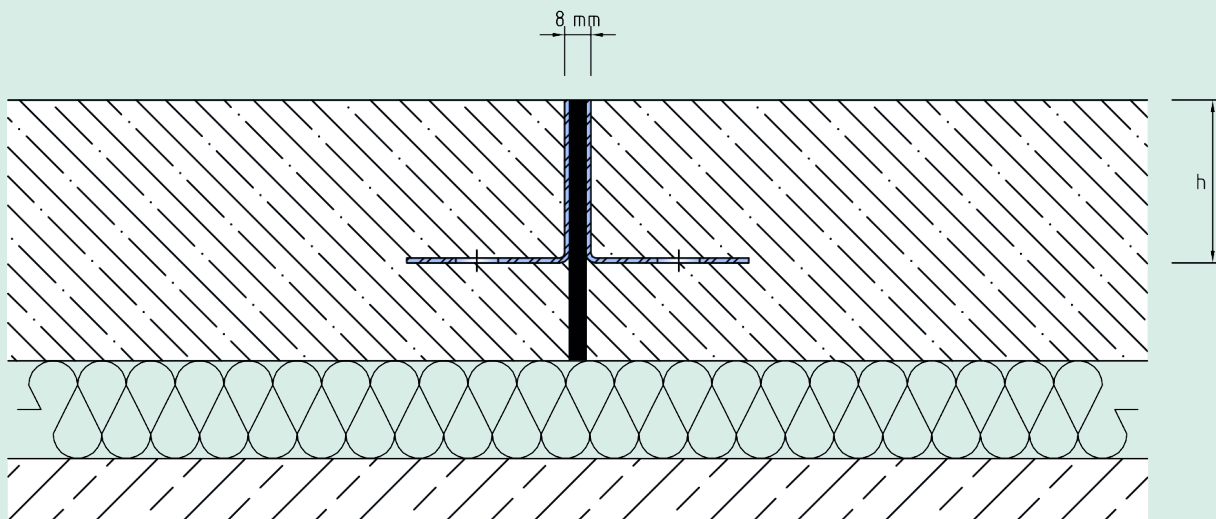

# VA.12.8

Subject to technical change without notice.