



STANDARD JOINT PROFILES

VA.12.9/..

- high edge protection
- visually appealing
- can be sanded without smearing effects

FEATURES

perforated bearing legs guarantee the best connection to the substrate/covering

APPLICATIONS

shopping centres, railway stations, airports, residential, office and administration buildings

MATERIAL


stainless steel V2A, K/VA foam material in the central section

COVERING TYPES

screed, natural and stone slabs, terrazzo covering

FORMED PARTS

corner piece, T-piece, cross piece

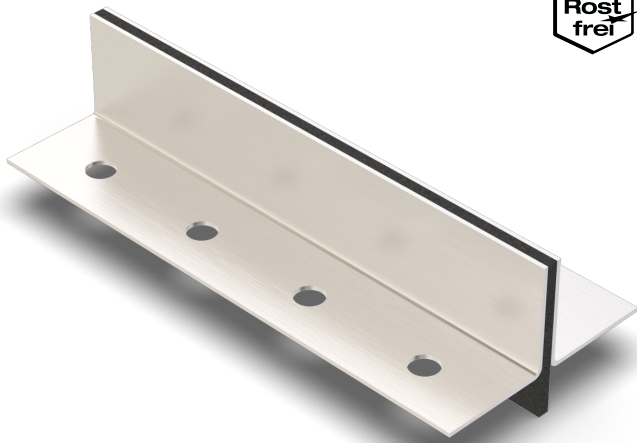


TECHNICAL DATA

Movement horizontal:	2 mm (± 1 mm)
Visible width:	9 mm
Material/sheet thickness:	2 mm
Load rating:	wheel load 600 kg up to \varnothing 150 mm, B = 100 mm
Supply length:	3 mtr
Color of expansion insert:	schwarz

DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)
VA.12.9/30	30 mm
VA.12.9/40	40 mm
VA.12.9/50	50 mm
VA.12.9/60	60 mm
VA.12.9/80	80 mm
VA.12.9/100	100 mm

Special heights on request.

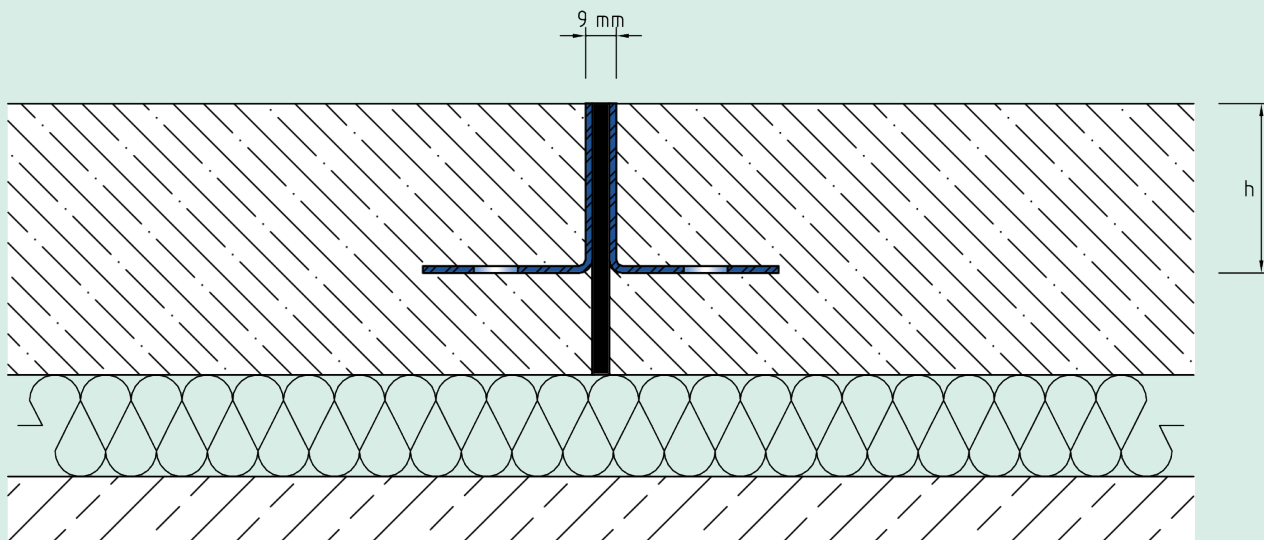

VA.12.9

Subject to technical change without notice.