



VA.1.40/.. G

- replaceable expansion insert
- hygiene-friendly and smooth expansion insert
- non-PVC
- stable aluminum supports
- stainless steel profile edge

FEATURES

expansion insert can be replaced anytime, abrasion-, weather- and temperature-resistant (-40°C to +120°C), perforated bearing legs guarantee the best connection to the substrate/covering

APPLICATIONS

residential, office and administration buildings, hospitals and clean rooms

MATERIAL

aluminium support with stainless steel profile edge, EPDM expansion insert

COVERING TYPES


screed, natural and stone slabs

FORMED PARTS

corner piece, T-piece, cross piece, floor-wall connections

NOTES

For mastic asphalt, please ask for technical advice.

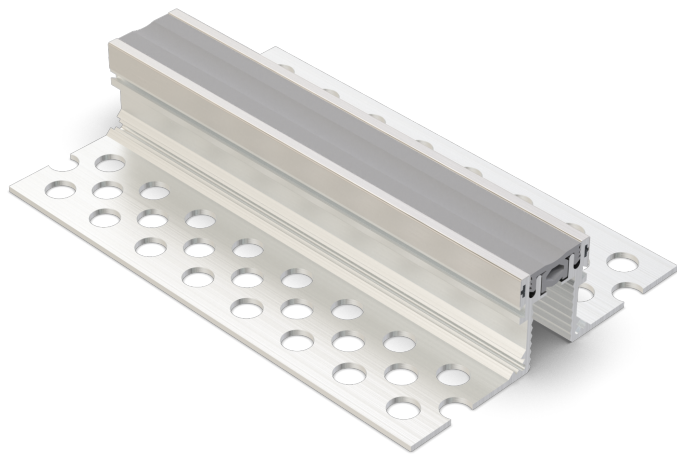


TECHNICAL DATA

Movement horizontal:	6 mm (±3 mm)
Movement vertical:	6 mm (±3 mm)
Visible width:	43 mm
Maximal joint width:	30 mm
Load rating:	wheel load 700 kg up to Ø 150 mm, B = 100 mm
Supply length:	3 mtr
Color of expansion insert:	grau

DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)	RECESS (BxT)
VA.1.40/21 G	21 mm	200 x 31 mm
VA.1.40/34 G	34 mm	200 x 44 mm
VA.1.40/51 G	51 mm	200 x 61 mm
VA.1.40/64 G	64 mm	200 x 74 mm
VA.1.40/84 G	84 mm	200 x 94 mm
VA.1.40/104 G	104 mm	200 x 114 mm
VA.1.40/124 G	124 mm	200 x 134 mm

Special heights on request.

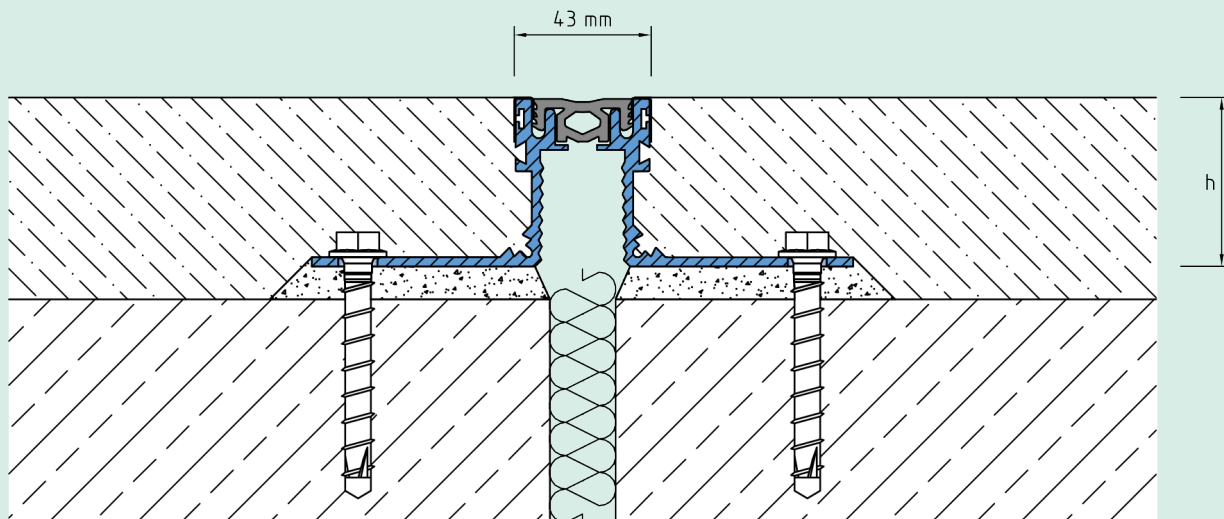

VA.1.40

Subject to technical change without notice.