



## VA.3.20/..

- replaceable expansion insert
- narrow visible surface
- non-PVC

### FEATURES

expansion insert can be replaced anytime, abrasion-, weather- and temperature-resistant (-40°C to +120°C), resistant to de-icing salt and waste water (alkalis, microbes, bacteria), perforated bearing legs guarantee the best connection to the substrate/covering

### APPLICATIONS

shopping centres, railway stations, airports, exhibition halls, residential, office and administration buildings

### MATERIAL

stainless steel V2A, EPDM expansion insert

### COVERING TYPES

coating, screed, natural and stone slabs

### FORMED PARTS

corner piece, T-piece, cross piece

### NOTES

For mastic asphalt, please ask for technical advice.




### TECHNICAL DATA

Movement horizontal:	4 mm (±2 mm)
Movement vertical:	2 mm (±1 mm)
Visible width:	20 mm
Maximal joint width:	15 mm
Load rating:	wheel load 700 kg up to Ø 150 mm, B = 100 mm
Supply length:	3 mtr
Color of expansion insert:	schwarz oder grau

### DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)	RECESS (BxT)
VA.3.20/20	20 mm	160 x 30 mm
VA.3.20/30	30 mm	160 x 40 mm
VA.3.20/40	40 mm	160 x 50 mm
VA.3.20/50	50 mm	160 x 60 mm
VA.3.20/60	60 mm	160 x 70 mm
VA.3.20/80	80 mm	160 x 90 mm

Special heights on request.

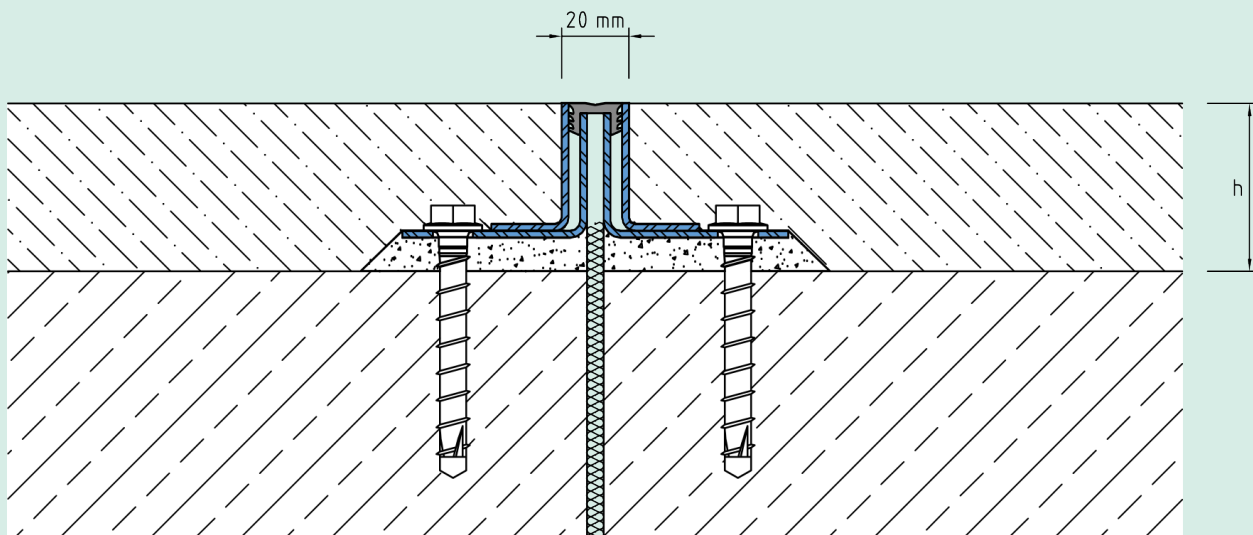

# VA.3.20

Subject to technical change without notice.