



VA.3.20/.. G

- replaceable expansion insert
- hygiene-friendly and smooth expansion insert
- narrow visible surface
- non-PVC

FEATURES

expansion insert can be replaced anytime, abrasion-, weather- and temperature-resistant (-40°C to +120°C), resistant to de-icing salt and waste water (alkalis, microbes, bacteria), perforated bearing legs guarantee the best connection to the substrate/covering

APPLICATIONS

shopping centres, railway stations, airports, exhibition halls, residential, office and administration buildings, hospitals and clean rooms

MATERIAL

stainless steel V2A, EPDM expansion insert

COVERING TYPES

coating, screed, natural and stone slabs

FORMED PARTS

corner piece, T-piece, cross piece

NOTES

For mastic asphalt, please ask for technical advice.




TECHNICAL DATA

Movement horizontal:	4 mm (±2 mm)
Movement vertical:	2 mm (±1 mm)
Visible width:	20 mm
Maximal joint width:	15 mm
Load rating:	wheel load 700 kg up to Ø 150 mm, B = 100 mm
Supply length:	3 mtr
Color of expansion insert:	schwarz oder grau

DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)	RECESS (BxT)
VA.3.20/20 G	20 mm	160 x 30 mm
VA.3.20/30 G	30 mm	160 x 40 mm
VA.3.20/40 G	40 mm	160 x 50 mm
VA.3.20/50 G	50 mm	160 x 60 mm
VA.3.20/60 G	60 mm	160 x 70 mm
VA.3.20/80 G	80 mm	160 x 90 mm

Special heights on request.

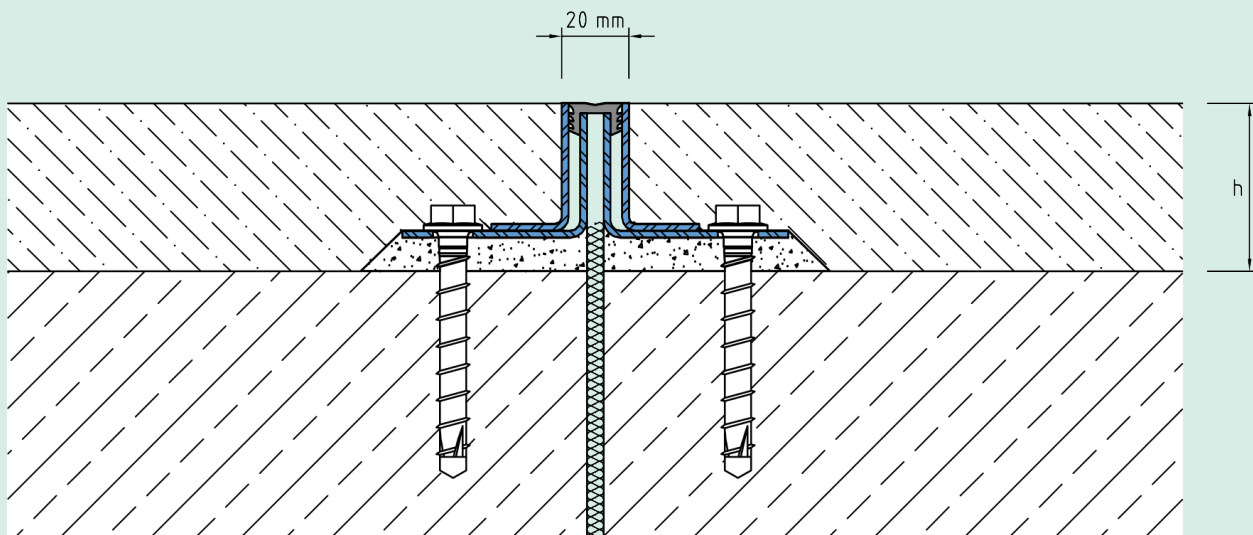

VA.3.20

Subject to technical change without notice.