




VA.6.45/..

- for heavy loads
- suitable for all types of covering
- visible surface in stainless steel
- narrow visible surface

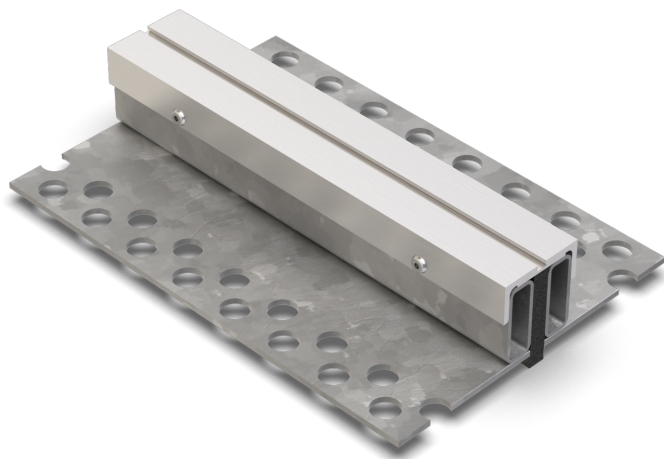

FEATURES

resistant to heavy loads, trafficable by fork-lift trucks, perforated bearing legs guarantee the best connection to the substrate/covering

APPLICATIONS

all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

substructure hot-dip galvanised steel and visible surface stainless steel V2A, K/VA foam material in the central section

COVERING TYPES

asphalt, coating, concrete, screed, industrial coverings, natural and stone slabs

TRAFFICABILITY

industrial trucks (lifting trucks, fork-lifts etc.), passenger cars, trucks

FORMED PARTS

corner piece, T-piece, cross piece

NOTES


Depending on the floor covering, we recommend installing a grouting seal between the joint profile and the covering to prevent the hairline crack caused by the building physics.

TECHNICAL DATA

Movement horizontal:	6 mm (±3 mm)
Movement vertical:	2 mm (±1 mm)
Visible width:	45 mm
Maximal joint width:	20 mm
Load rating:	wheel load 5000 kg up to Ø 150 mm, B = 100 mm
Load rating trucks:	600 kN (DIN 1072)
Load rating forklifts:	150 kN (DIN 1055-3)
Supply length:	3 mtr

DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)	RECESS (BxT)
VA.6.45/30	28 mm	210 x 38 mm
VA.6.45/40	38 mm	210 x 48 mm
VA.6.45/50	48 mm	210 x 58 mm
VA.6.45/70	68 mm	210 x 78 mm

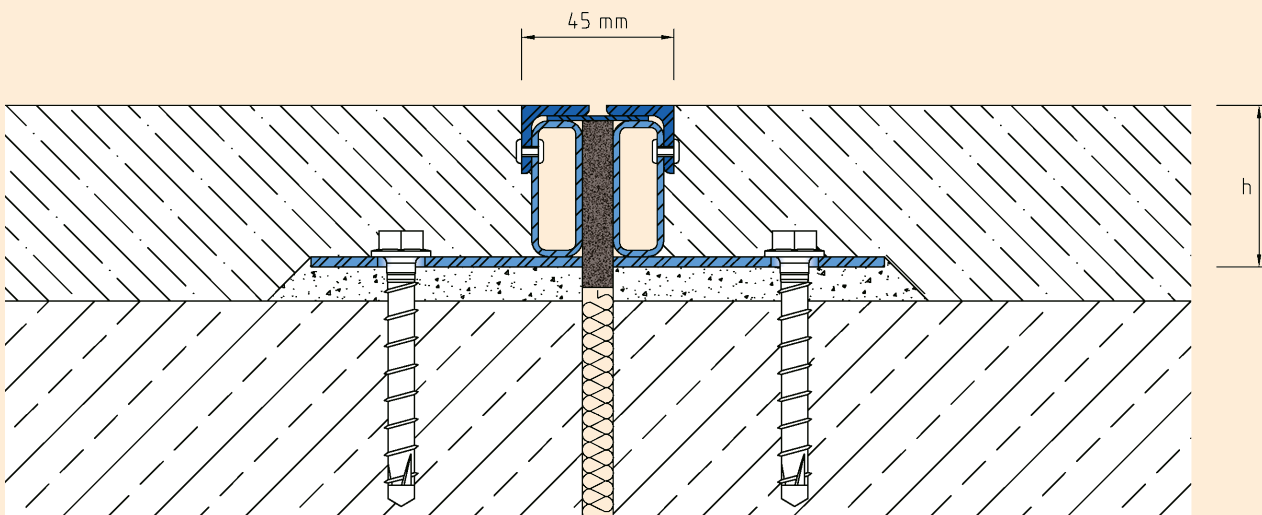

VA.6.45

Subject to technical change without notice.