




VA.7.165/0

- for heavy loads
- installation in site-mixed concrete
- vibration-free trafficability
- visible surface in stainless steel

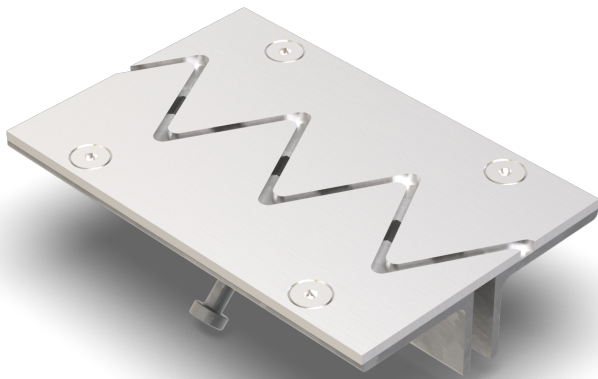

FEATURES

resistant to heavy loads, trafficable by fork-lift trucks

APPLICATIONS

all industrial applications, areas with use of driverless vehicular systems, shopping centres, railway stations, airports, exhibition halls

MATERIAL

substructure hot-dip galvanised steel and visible surface stainless steel V2A (V4A on request)

COVERING TYPES

concrete, industrial coverings

TRAFFICABILITY

industrial trucks (lifting trucks, fork-lifts etc.), passenger cars, trucks

FORMED PARTS


corner piece, T-piece, cross piece

TECHNICAL DATA

Movement horizontal:	25 mm (-10/+15 mm)
Visible width:	165 mm
Maximal joint width:	15 mm
Load rating:	wheel load 5000 kg up to Ø 150 mm, B = 100 mm
Load rating trucks:	600 kN (DIN 1072)
Load rating forklifts:	150 kN (DIN 1055-3)
Supply length:	3 mtr

DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)
VA.7.165/0	56 mm

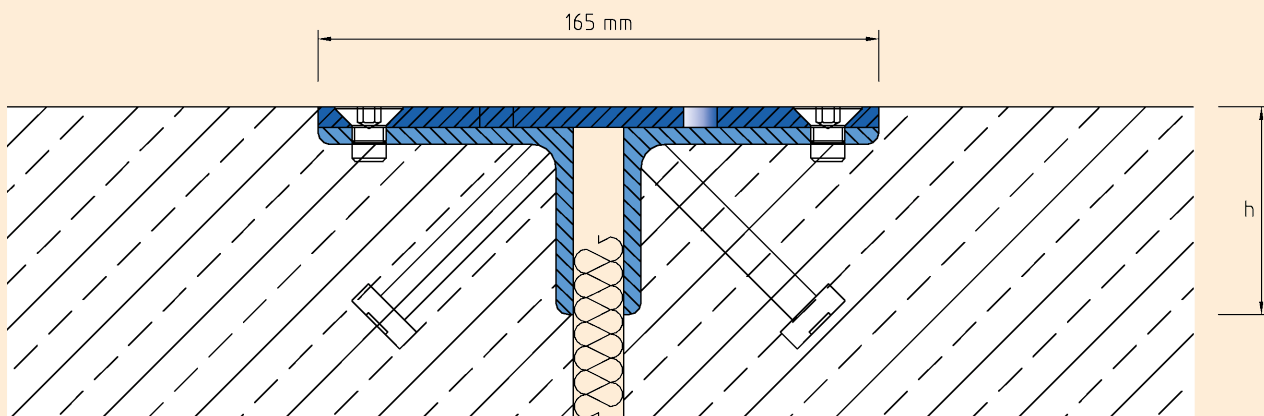

VA.7.165

Subject to technical change without notice.