## STATERTIGHT JOINT PROFILES



# VA.8.135/..

- high load-bearing capacity
- low installation height
- anti-slip structured visible surface



### FEATURES

watertight, resistant to heavy loads, expansion insert can be replaced anytime, abrasion-, weather- and temperature-resistant (-40°C to +120°C), resistant to de-icing salt and waste water (alkalis, microbes, bacteria), a different sealing membrane can be used by arrangement

#### **APPLICATIONS**

parking decks, parking garages, underground garages, ramp crossings, pedestrian bridges

#### MATERIAL

substructure hot-dip galvanised steel and visible surface stainless steel V2A (V4A on request), EPDM expansion insert, Wolfin IB sealing membrane

#### **COVERING TYPES**

coating, concrete, screed, natural and stone slabs

#### TRAFFICABILITY

passenger cars, trucks

#### **FORMED PARTS**

upstand, end piece, corner piece, T-piece, cross piece, floor-wall connections

#### NOTES

The sealing and expansion insert is flanged with screws M8 at intervals of 150 mm.

The sealing membrane projecting from the joint profile must be integrated into the sealing system to prevent water infiltration from the sides.

For profile height 21 mm and 36 mm minimum joint width 75 mm. Installation by our own fitters recommended.

#### **TECHNICAL DATA**

Movement horizontal:
Movement vertical:
Visible width:
Maximal joint width:
Load rating trucks:
Supply length:
Color of expansion insert


80 mm (-30/+50 mm) 30 mm (±15 mm) 135 mm 100 mm 600 kN (DIN 1072) 3 mtr schwarz

#### DESIGNS

ARTICLE NO.	Ρ
VA.8.135/20	2
VA.8.135/35	3
VA.8.135/50	5
VA.8.135/60	6
VA.8.135/90	9

PROFILE HEIGHT (h) 21 mm 36 mm 51 mm 61 mm 91 mm

RECESS (BXT) 300 x 31 mm 300 x 46 mm 300 x 61 mm 300 x 71 mm 300 x 101 mm

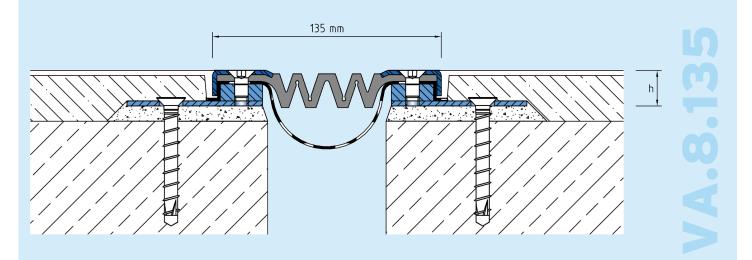

Subject to technical change without notice.