



VA.8.135/0

- high load-bearing capacity
- installation in site-mixed concrete
- anti-slip structured visible surface

FEATURES

watertight, resistant to heavy loads, trafficable by fork-lift trucks, expansion insert can be replaced anytime, abrasion-, weather- and temperature-resistant (-40°C to +120°C), resistant to de-icing salt and waste water (alkalis, microbes, bacteria)

APPLICATIONS

parking decks, parking garages, underground garages, ramp crossings, pedestrian bridges, all industrial applications

MATERIAL

substructure hot-dip galvanised steel and visible surface stainless steel V2A (V4A on request), EPDM expansion insert, Wolfin IB sealing membrane

COVERING TYPES

coating, concrete, industrial coverings

TRAFFICABILITY

passenger cars, trucks

FORMED PARTS

corner piece, T-piece, cross piece, floor-wall connections, upstand, end piece

NOTES

The sealing and expansion insert is flanged with screws M8 at intervals of 150 mm.

Grouting profile VP5/20 is already fitted at the factory.

The sealing membrane projecting from the joint profile must be integrated into the sealing system to prevent water infiltration from the sides.

Installation by our own fitters recommended.




TECHNICAL DATA

Movement horizontal:	80 mm (-30/+50 mm)
Movement vertical:	30 mm (±15 mm)
Visible width:	135 mm
Maximal joint width:	75 mm
Load rating trucks:	600 kN (DIN 1072)
Supply length:	3 mtr
Color of expansion insert:	schwarz

DESIGNS

ARTICLE NO.	PROFILE HEIGHT (h)
VA.8.135/0	58 mm

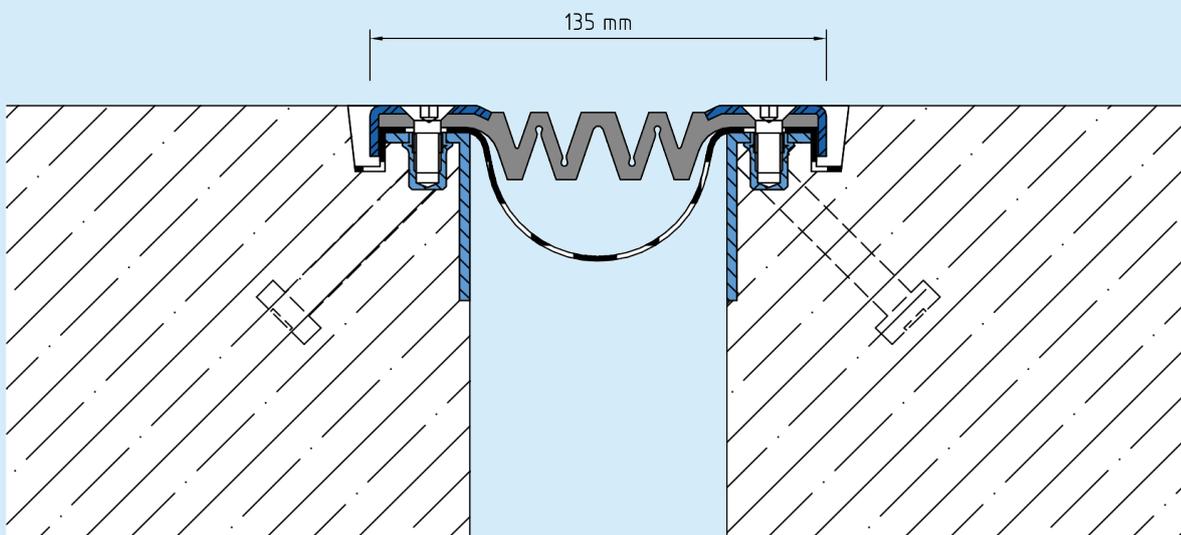

VA.8.135

Subject to technical change without notice.